

# UTILITY PATENT APPLICATION TRANSMITTAL (Large Entity)

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.  
311284/99

Total Pages in this Submission

## TO THE ASSISTANT COMMISSIONER FOR PATENTS

Box Patent Application  
Washington, D.C. 20231

Transmitted herewith for filing under 35 U.S.C. 111(a) and 37 C.F.R. 1.53(b) is a new utility patent application for an invention entitled:

PRINTER

and invented by:

Takehiko OGURA

If a **CONTINUATION APPLICATION**, check appropriate box and supply the requisite information:

☒ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: \_\_\_\_\_

Which is a:

☒ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: \_\_\_\_\_

Which is a:

☒ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No.: \_\_\_\_\_

Enclosed are:

### Application Elements

1. ☒ Filing fee as calculated and transmitted as described below
2. ☒ Specification having 39 pages and including the following:
  - a. ☒ Descriptive Title of the Invention
  - b. ☐ Cross References to Related Applications (if applicable)
  - c. ☐ Statement Regarding Federally-sponsored Research/Development (if applicable)
  - d. ☐ Reference to Microfiche Appendix (if applicable)
  - e. ☒ Background of the Invention
  - f. ☒ Brief Summary of the Invention
  - g. ☒ Brief Description of the Drawings (if drawings filed)
  - h. ☒ Detailed Description
  - i. ☒ Claim(s) as Classified Below
  - j. ☒ Abstract of the Disclosure

# UTILITY PATENT APPLICATION TRANSMITTAL (Large Entity)

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.

311284/99

Total Pages in this Submission

## Application Elements (Continued)

3. ☒ Drawing(s) (when necessary as prescribed by 35 USC 113)
- a. ☒ Formal Number of Sheets 16 (Figs. 1-16)
- b. ☐ Informal Number of Sheets \_\_\_\_\_
4. ☒ Oath or Declaration
- a. ☒ Newly executed (original or copy) ☐ Unexecuted
- b. ☐ Copy from a prior application (37 CFR 1.63(d)) (for continuation/divisional application only)
- c. ☒ With Power of Attorney ☐ Without Power of Attorney
- d. ☐ DELETION OF INVENTOR(S)  
Signed statement attached deleting inventor(s) named in the prior application,  
see 37 C.F.R. 1.63(d)(2) and 1.33(b).
5. ☐ Incorporation By Reference (usable if Box 4b is checked)  
The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied under Box 4b, is considered as being part of the disclosure of the accompanying application and is hereby incorporated by reference therein.
6. ☐ Computer Program in Microfiche (Appendix)
7. ☐ Nucleotide and/or Amino Acid Sequence Submission (if applicable, all must be included)
- a. ☐ Paper Copy
- b. ☐ Computer Readable Copy (identical to computer copy)
- c. ☐ Statement Verifying Identical Paper and Computer Readable Copy

## Accompanying Application Parts

8. ☒ Assignment Papers (cover sheet & document(s))
9. ☐ 37 CFR 3.73(B) Statement (when there is an assignee)
10. ☐ English Translation Document (if applicable)
11. ☒ Information Disclosure Statement/PTO-1449 ☒ Copies of IDS Citations
12. ☐ Preliminary Amendment
13. ☒ Acknowledgment postcard
14. ☐ Certificate of Mailing
- ☐ First Class ☐ Express Mail (Specify Label No.): \_\_\_\_\_

**UTILITY PATENT APPLICATION TRANSMITTAL**  
**(Large Entity)**

*(Only for new nonprovisional applications under 37 CFR 1.53(b))*

Docket No.

311284/99

Total Pages in this Submission

**Accompanying Application Parts (Continued)**

15. ☒ Certified Copy of Priority Document(s) *(if foreign priority is claimed)*

16. ☐ Additional Enclosures *(please identify below):*

**Request That Application Not Be Published Pursuant To 35 U.S.C. 122(b)(2)**

17. ☐ Pursuant to 35 U.S.C. 122(b)(2), Applicant hereby requests that this patent application not be published pursuant to 35 U.S.C. 122(b)(1). Applicant hereby certifies that the invention disclosed in this application has not and will not be the subject of an application filed in another country, or under a multilateral international agreement, that requires publication of applications 18 months after filing of the application.

**Warning**

***An applicant who makes a request not to publish, but who subsequently files in a foreign country or under a multilateral international agreement specified in 35 U.S.C. 122(b)(2)(B)(i), must notify the Director of such filing not later than 45 days after the date of the filing of such foreign or international application. A failure of the applicant to provide such notice within the prescribed period shall result in the application being regarded as abandoned, unless it is shown to the satisfaction of the Director that the delay in submitting the notice was unintentional.***

**UTILITY PATENT APPLICATION TRANSMITTAL**  
**(Large Entity)**

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Docket No.  
311284/99


Total Pages in this Submission

**Fee Calculation and Transmittal**

**CLAIMS AS FILED**

For	#Filed	#Allowed	#Extra	Rate	Fee
Total Claims	10	- 20 =	0	x \$18.00	\$0.00
Indep. Claims	2	- 3 =	0	x \$80.00	\$0.00
Multiple Dependent Claims (check if applicable) <input type="checkbox"/>					\$0.00
BASIC FEE					\$710.00
OTHER FEE (specify purpose) <u>ASSIGNMENT RECORDAL FEE</u>					\$40.00
TOTAL FILING FEE					\$750.00

- ☒ A check in the amount of **\$750.00** to cover the filing fee is enclosed.
- ☒ The Commissioner is hereby authorized to charge and credit Deposit Account No. **50-0481** as described below. A duplicate copy of this sheet is enclosed.
- ☐ Charge the amount of \_\_\_\_\_ as filing fee.
- ☒ Credit any overpayment.
- ☒ Charge any additional filing fees required under 37 C.F.R. 1.16 and 1.17.
- ☐ Charge the issue fee set in 37 C.F.R. 1.18 at the mailing of the Notice of Allowance, pursuant to 37 C.F.R. 1.311(b).

  
Signature

SEAN M. MCGINN  
REG. NO. 34,386

CUSTOMER NO. 21254

Dated: **OCTOBER 30, 2000**

CC:

# PRINTER

## BACKGROUND OF THE INVENTION

### 5 Field of the Invention

The present invention relates to the editing of printer output data into an output format, and more particularly to a printer that edits line printer output data into a page printer output format and outputs the data.

10

### Description of the Related Art

Japanese Patent Laid-Open Publication No. Hei 5-201077 and Japanese Patent Laid-Open Publication No. Hei 10-329369, in which the prior art is disclosed, will be described. The  
15 print control method and the print controller disclosed in Japanese Patent Laid-Open Publication No. Hei 5-201077 will be described with reference to FIG. 12. Referring to FIG. 12, a print controller A1, which receives data from a host computer A10, processes received data with a master processor module  
20 A100, a slave processor module A110, and a slave processor module A120, one page at a time. The commands transferred between the host computer A10 and the print controller A1 are classified into two types, constraint commands A11A1 and non-constraint commands A11A2, as shown in FIG. 13. Referring  
25 to FIG. 14, the constraint command A11A1 is composed of a command A92 which defines parameters effective for all pages of a document, a reset command BA93, a command string A94 composed of drawing attribute parameter setting commands and drawing commands, a reset command BA96, and a page change A95 or a page  
30 change A98 which is always added as a page delimiter. Therefore,

even if the processors A100, A110, and A120 perform processing in parallel, one page at a time, there is no effect on the print result because there is no format information effective across pages and therefore. However, this print control method and the print controller have the following problems.

The first problem is that, when a non-constraint command A11A2 is executed on a printer controller A11 for printing at a high speed as shown in FIG. 13, the host computer A10 must always convert (A11B) the non-constraint command to a constraint command. In other words, when the type of the host computer A10 changes, conversion A11B from a non-constraint command to a constraint command is necessary.

The second problem is that, when a non-constraint command A11A2 is printed without being converted to a constraint command A11A1, it is judged that the page delimiter is issued only when the specification, such as the paper size or the number of copies which are specified for a page only once, is changed at the start of a page. Therefore, when the character size or the line feeding amount is changed while a page is output and, as a result, the number of lines exceeds the page length, the print result is not output correctly.

Next, the printer disclosed in Japanese Patent Laid-Open Publication No. Hei 10-329369 will be described with reference to FIG. 15. A printer B1 shown in FIG. 15 receives data B21 from a host computer into the receiving buffer via an interface controller B4 of a master board B2. Format information that is searched for is stored in a format information storage unit B6 or B11. Editing units B7 and B12 each reference the received data B21 and the format information storage unit B6 or B11 to start editing. Edited and updated

format information and page change information are stored in the format information storage unit B6 or B11. Drawing units B8 and B13 process the edited data B21 and B25 and generate video output data as drawn data B26. A printing unit B9 receives the drawn data B26, manages page numbers, and outputs the video output data to an engine in the DMA output mode. The operation will be described with reference to the timing chart shown in FIG. 16. In FIG. 16, when the master board B2 starts the editing processing of the first page, a slave board B3 starts the pre-editing processing of the first page. Next, when the master board B2 starts drawing processing, the slave board B3 starts editing processing. After the editing processing is completed, changed information is written back into the format information storage unit B6 or B11 and the editing processing of the next page starts by referring to that information. Thus, the print result is always valid even for data whose page change code is not definite. However, a processor must wait during editing processing until the editing processing of the preceding page is completed. Therefore, at the time the pre-editing processing is completed, only the editing of the preceding page is completed. The detection of format information and the detection of the page delimiter, performed during the pre-editing processing, become meaningless. The result is that, after pre-editing processing, only the format information set up for the preceding page is copied into the format information storage area. In addition, when data requires much editing time, performance is significantly reduced.

As described above, the problem with the technology disclosed in the former publication is as follows. When a non-constraint command AllA2 is executed on a printer

controller A11 for printing at a high speed, the host computer A10 must always convert (A11B) the non-constraint command to a constraint command. In other words, when the type of the host computer A10 changes, conversion A11B from a non-constraint command to a constraint command for a new computer is necessary. In addition, when a non-constraint command is printed without being converted to a constraint command, it is judged that the page delimiter is issued only when the specification, such as the paper size or the number of copies which are specified for a page only once, is changed at the start of a page. Therefore, when the character size or the line feeding amount is changed while a page is output and, as a result, the number of lines exceeds the page length, the print result is not output correctly.

The problem with the technology disclosed in the latter publication is as follows. After the editing processing is completed, changed information is written back into the format information storage unit B6 or B11 and the editing processing of the next page starts by referring to that information. Thus, the print result is always valid even for data whose page change code is not definite. However, a processor must wait during editing processing until the editing processing of the preceding page is completed. Therefore, at the time the pre-editing processing is completed, only the editing of the preceding page is completed. The detection of format information and the detection of the page delimiter, performed during the pre-editing processing, become meaningless. The result is that, after pre-editing processing, only the format information set up for the preceding page is copied into the format information storage area. In addition, when data



requires much editing time, performance is significantly reduced.

#### SUMMARY OF THE INVENTION

5

It is an object of the present invention to provide a quick and correct print result for existing data created by non-constraint commands.

10 It is another object of the present invention to allow a printer to start editing the next page without waiting for the completion of the editing processing of the preceding page in order to increase performance.

To achieve the above objects, the present invention provides a printer which draws page data for outputting one page at a time, the page data being edited from line printer output format to a page format based on format information. The printer comprises one master board and one or more slave boards each executing pre-editing processing in which a temporary page change position delimiting pages is calculated with the data unedited; editing processing in which data in a next page following the temporary page change position is edited based on the format information to define an actual page change position and the temporary page change position is corrected by the actual page change position to define the page data of the next page; and drawing processing in which the page data is drawn, wherein the master board and slave boards execute the pre-editing processing of the data before the editing processing and the drawing processing.

25 In addition, the master board comprises a basic unit transferring the data and control information to or from

30

processing units and to or from the slave boards, wherein the processing units, all connected to the basic unit, include a receiver which receives the data from a host computer; a receiving buffer in which the data is stored; a pre-editing unit which acquires data from the receiving buffer and calculates the temporary page change position; a second format information storage unit in which format information on a next page following the temporary page change position is stored; a first format information storage unit in which format information common to edited pages is accumulated by obtaining the format information on the edited pages from the second format information storage unit; an editing unit which edits the next page following the temporary page change position defined by the pre-editing unit to define the actual page change position based on the format information stored in the first and second format information storage units, corrects the temporary page change position with the actual page change position, and defines the page data of the next page; a drawing unit which generates drawing data from the page data; a print controller which converts the drawing data into video output data; an output controller which transfers the video output data sent from the print controller and from a print controller of the slave boards to a printer engine to manage a page of the video output data; and a user interface which sends or receives operation information to or from an operator panel operated by a user.

In addition, each of the slave boards comprises a basic unit transferring the data and control information to or from processing units and to or from the master board, wherein the processing units, all connected to the basic unit, include a

pre-editing unit which calculates the temporary page change position of data acquired from a receiving buffer; a second format information storage unit in which format information on a next page following the temporary page change position is stored; an editing unit which edits the next page to define the actual page change position based on the format information stored in a first format storage unit in which common format information is stored and in the second format information storage unit, corrects the temporary page change position with the actual page change position, and defines the page data of the next page; a drawing unit which generates drawing data from the page data; and a print controller which converts the drawing data into video output data.

In addition, the receiving buffer cyclically uses a buffer area in which data from the host computer is stored and an area which is used for the editing processing and, when the buffer becomes full before the page change position is detected during the editing processing, stops receiving the data and synchronizes the format information by distributing the so-far received data among the master board and the slave board to avoid a buffer overflow and to continue processing.

In addition, the pre-editing unit checks whether or not statements coded in a page printer description language are present and, when statements coded in the page printer description language are found, defines a position defined by page change information as the page change position and, when there is no statement coded in the page printer description language, calculates the temporary page change position from a number of characters and a number of lines, the temporary page change position delimiting pages.

In addition, the common format information, which is the format information passed across edited pages, includes character pitch information, character size information, left margin information, right margin information, horizontal tab information, vertical tab information, line feeding information, font information, character decoration information, paper size information, print orientation information, number-of-copies information, form information, external character definition information, and page change information.

Also, the printer according to the present invention comprises two or more boards, each comprising a pre-editing unit which performs pre-editing processing in which, in order to delimit received data into pages, format information is extracted from a start of non-delimited data beginning with the start of the received data and a temporary page change position is calculated, the temporary page change position being a trailing end of a page whose leading end is the start of the non-delimited data; an editing unit which performs editing processing in which data following the temporary page change position is edited and an actual page change position is calculated to output editing data of a page, the actual page change position being an actual trailing end of the page whose leading end is the temporary page change position; and a drawing unit which performs drawing processing in which the edited data is drawn and video output data is generated, wherein, when a pre-editing unit of a first board completes first pre-editing processing, a pre-editing unit of a second board where none of pre-editing processing, editing processing, and drawing processing is performed starts pre-editing processing in which,

even if the first editing processing calculating an actual page change position of a page whose temporary page change position was calculated by the first pre-editing processing is not yet completed, a temporary page change position of a page beginning  
5 with the temporary page change position calculated by the first pre-editing processing is calculated.

According to the present invention, when a pre-editing unit of a board completes pre-editing processing, some other board on which none of pre-editing processing, editing processing, and drawing processing is performed, starts  
10 pre-editing processing for calculating a temporary page change position of the next page even if editing processing calculating an actual page change position of the page, for which the temporary page change was calculated by the pre-editing processing, is not yet completed. Therefore, the  
15 printer according to the present invention eliminates the need for replacing, via the printer driver or the data filter, existing line-printer user data with data coded in page printer description language, enabling a page printer to print data  
20 quickly.

#### BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a diagram showing the configuration of a printer  
25 in a first embodiment of the present invention.

FIG. 2 is a diagram showing format information stored in the format information storage unit shown in FIG. 1.

FIG. 3 is a diagram showing the timing chart of the printer shown in FIG. 1.

30 FIGS. 4A, 4B, and 4C are diagrams showing the management

of the receiving buffer of the printer shown in FIG. 1.

FIG. 5 is a diagram showing data acquisition requests issued to the receiving buffer of the printer shown in FIG. 1.

5 FIG. 6 is a diagram showing the timing chart when a receiving buffer full condition occurs on the printer shown in FIG. 1.

FIG. 7 is a diagram showing the configuration of a printer in a second embodiment of the present invention.

10 FIG. 8 is a diagram showing the timing chart of the printer shown in FIG. 7.

FIG. 9 is a diagram showing data acquisition requests issued to the receiving buffer of the printer shown in FIG. 7.

15 FIG. 10 is a diagram showing the timing chart when a receiving buffer full condition occurs on the printer shown in FIG. 7.

FIGS. 11A and 11B are diagrams showing examples of printer configurations.

20 FIG. 12 is a diagram showing the configuration of a print controller in the prior art.

FIG. 13 is a diagram showing the command system of the print controller shown in FIG. 12.

25 FIG. 14 is a diagram showing the details of command data of the print controller shown in FIG. 12.

FIG. 15 is a diagram showing the configuration of a printer in the prior art.

FIG. 16 is a diagram showing the timing chart of the printer shown in FIG. 15.

## DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Referring to FIG. 1, a printer 1 used in a first embodiment of the present invention is shown.

5 As shown in FIG. 1, the printer 1 comprises a master board 2 and a slave board 3.

In response to a data send request from a host computer 17, a receiver 4 of the master board 2 stores data, received from the host computer 17, into a receiving buffer 20 acquired  
10 from a basic unit 7 in advance.

A pre-editing unit 8 issues a data acquisition request to the receiver 4 via the basic unit 7.

Similarly, the slave board 3 issues a data acquisition request to the receiver 4 via the basic unit 7 connected to  
15 a basic unit 12.

The basic units 7 and 12 provide other processing units with printer internal resources available only to the master board 2 as if those resources were connected to any processor. The printer internal resources available only to the master  
20 board 2 include a printer engine 19, an operator panel 18, auxiliary storage media not shown in the figure such as a non-volatile memory, a hard disk, and a floppy disk, and a receiving interface.

The receiver 4 receives all data requests from the boards on which processors are mounted. If there is data to be sent,  
25 the receiver 4 sends data to the pre-editing unit 8 or 13. When sending data, the receiver 4 sends the start address and the size of data, not actual data, in order to reduce the overhead time required for copying data between boards.

30 The pre-editing unit 8 or 13 performs one of two types

of processing according to the state of its own processor.

The first processing is performed when its own processor is executing pre-editing processing. In this case, as shown in FIG. 2, the pre-editing unit 8 or 13 stores format information, which is contained in the pages up to the page immediately preceding the page to be processed by its own processor, from a format information storage unit 21 into a format information storage unit 22 or 23. The pre-editing unit then detects the page delimiter in the format information, writes back the format information into the format information storage unit 21 via the basic unit 7 or 12, and informs the receiver 4 that the format information has been written.

The second processing is performed when its own processor is executing editing processing. In this case, the pre-editing unit 8 or 13 sends format information from the format information storage unit 22 or 23 to an editing unit 9 or 14 and edits actual data.

The editing unit 9 or 14 edits actual data based on the format information detected by the pre-editing unit 8 or 13. When the format information is updated, the editing unit 9 or 14 writes back the format information into the format information storage unit 21.

A drawing unit 10 or 15 receives edited page data from the editing unit 9 or 13, generates drawing data, and passes it to a print controller 11 or 16.

The print controller 11 or 16 generates video output data from the drawing data and passes it to the output controller 6.

The output controller 6 manages pages, which are output one page at a time, and starts video DMA operation for the



printer engine 19.

Referring to FIG. 2, page delimiter calculation processing performed by the pre-editing unit 8 or 13 shown in FIG. 1 and the configuration of format information stored in the format information storage units 21, 22, and 23 for use by the pre-editing unit 8 or 13 are shown.

The master board 2 has the format information storage unit 22 that is used for the processing of its own processor and the format information storage unit 21 that is shared by the master board 2 and the slave board 3. On the other hand, the slave board 3 has only the format information storage unit 23 used for the processing of its own processor.

Before pre-editing processing, the common format information stored in the format information storage unit 21, which is shared by the master board 2 and the slave board 3, is read into the format information storage unit 22 or 23 used for the processing of its own processor. When pre-editing processing is completed or if a mismatch is found in the format information after editing processing, the format information is written back into the format information storage unit 21. As a result, the format information storage unit 21 shared by the master board 2 and the slave board 3 stores therein format information common to the pages immediately preceding the page that is to be processed.

The common format information refers to information passed from page to page, that is, format information of the immediately preceding page or format information set up not for the immediately preceding page but for the pages preceding the immediately preceding page. More specifically, the common format information includes character pitch information 211,

character size information 212, left margin information 213, right margin information 214, horizontal tab information 215, vertical tab information 216, line feeding width information 217, font information 218, character decoration information 219 (reverse print, underline, italic, bold), paper size information 220, print orientation information 221 (portrait, landscape), form information 222, external character definition information 223, number-of-copies information 224, and page change information 225.

The pre-editing unit 8 or 13 first checks if there are statements coded in the page printer description language. If there are statements coded in the page printer description language, the pre-editing unit 8 or 13 stores format information existing before the page change information into the format information storage unit 22 or 23 (20201, 20202, 20203). The offset from the start address of the data received from the receiver 4 is stored in the pointer format.

If there is no statement coded in the page printer description language, the pre-editing unit 8 or 13 calculates the page delimiter position from the number of characters and the number of lines and, as with the statements coded in the page printer description language, stores format information existing before the page change information into the format information storage unit 22 or 23 (209).

A check is made for the number of characters per line considering the fact that the number of lines increases when a right margin overflow is caused by an automatic page change because of too many characters. The format information which may be involved in a right margin overflow includes the character pitch information 211, character size information

212, left margin information 213, right margin information 214, horizontal tab information 215, font information 218, paper size information 220, and print orientation information (portrait, landscape) 221.

5 A check is made for the number of lines considering the fact that a bottom margin overflow may cause an automatic page change. The format information which may be involved in a bottom margin overflow includes vertical tab information 216, line feeding width information 217, and paper size information 220.

10 In addition, a right margin overflow, which generates the number of lines exceeding the number of lines per page, also causes a bottom margin overflow.

15 It should be noted that, even if a page delimiter position is detected considering the format information, actual editing processing is not performed. The delimiter position value, which is a calculated value, may include an error. The pre-editing unit 8 or 13 would perform the same processing as the editing unit in order to eliminate this error, meaning that there is no meaning in performing pre-editing processing.

20 Therefore, when an error is generated, the editing unit 9 or 14 changes the page change position 209 calculated during pre-editing processing to the page change position 206 generated as a result of editing processing and stores the corrected value in the format information storage units 21, 25 and 22 or 23 to allow correct format information to be passed from page to page. (206)

30 Another function of the pre-editing unit 8 or 13 is to copy all data from the receiving buffer 20 to a local memory of each processor, not shown in the figure, when the receiving buffer 20 becomes full. Because the pre-editing unit 8 or 13

does not release data acquired from the receiver 4 until the page delimiter is detected, this copy operation forces the receiving buffer 20 to be released for continued processing.

Next, the operation of the printer 1 shown in FIG. 1 will be described with reference to the timing chart shown in FIG. 3 while referring to the timing chart, shown in FIG. 5, of a data acquisition request issued to the receiving buffer 20. In the example shown in FIG. 3, the first page 2001 of data 200 stored in the receiving buffer 20 contains double-sided printing data which takes long in drawing. The page change position of each page is not definite, and six pages of print data, page 2001 to page 2006, will be printed beginning with the master board 2.

First, for the received data 200 stored into the receiving buffer 20 by the receiver 4 shown in FIG. 1, the same data (start address of the receiving buffer and the size) is sent (53 and 54 in FIG. 5) in response to a data acquisition request (51 in FIG. 5) from the pre-editing unit 13 and a data acquisition request (52 in FIG. 5) from the pre-editing unit 8. However, because neither the pre-editing unit 8 nor the pre-editing unit 13 has no means for determining which will perform editing processing for the first page, the receiver 4 notifies that editing processing will be performed by the master board 2 and that pre-editing processing will be performed by the slave board 3.

Because there is no preceding page data, the pre-editing unit 8 of the master board 2 performs no processing but passes actual data to the editing unit 9 for editing processing.

The pre-editing unit 13 of the slave board 3 searches the format information on the first page 2001 for the page change

position, stores the format information into the format information storage unit 23, and updates the format information in the format information storage unit 21 of the master board 2. The pre-editing unit also updates the read pointer of the receiving buffer 20 and informs the receiver 4 that the pre-editing processing of the first page 2001 has finished (58 in FIG. 5).

When pre-editing processing 20011 of the first page 2001 is completed, the editing unit 14 starts editing processing 20022 of the second page 2002 without waiting for the completion of the editing processing 20012 of the first page 2001.

When the editing processing 20012 on the master board 2 is completed, the page change position of the first page 2001 detected by the pre-editing unit 13 of the slave board 3 is compared with the page change position detected by the editing unit 9 to check if they are the same.

One of the reasons for a mismatch in the page change position is a character size change during processing of a line. A character size change causes a line pitch change which, in turn, causes a bottom margin overflow and an automatic page change. Also, a character pitch change causes a right margin overflow and an automatic page change, which may increase the number of lines and generate a bottom margin overflow and an automatic page change. If the pre-editing unit 8 or 13 must detect these factors, they would have to perform the same processing as the editing unit 9 or 14. In this case, the pre-editing unit 8 or 13 according to the present invention, which quickly detects the format information and a page change position and passes them to the next page, becomes meaningless.

When the page change positions (200n1 and 200n2 in FIG.

2) differ and the page change position detected by the pre-editing unit 13 is nearer to the start of the acquired received data, information from the page change position detected by the pre-editing unit 13 to the page change position detected by the editing unit 9 is passed to the editing unit 14.

Because the editing unit 14 performs extra editing, the editing data received from the editing unit 9 is deleted. Conversely, when the page change position detected by the editing unit 9 is nearer to the start of the receiving buffer, the editing unit 9 performs the editing processing of data from the page change position (200n2 in FIG. 2) detected by the editing unit 9 to the page change position (200n1 in FIG. 2) detected by the pre-editing unit 13 and passes the result to the editing unit 14 of the slave board 3.

In this way, by adjusting editing data with the other processor after completion of the editing processing, the page change position can be detected correctly although the immediately preceding page and the currently-editing page are asynchronous and, at the same time, the correct format information can be passed.

After that, the master board 2 and the slave board 3 perform the drawing processing via the drawing unit 10 or 15 to generate video output data.

The slave board 3 which has completed processing earlier, the print controller 16 passes the pointer to the video output data to the output controller 6 of the master board 2. At this time, because the master board 2 has not yet completed the drawing processing of the first page (20013 in FIG. 3), the processing 2003 of the third page is performed again by the

slave board 3.

The slave board 3 references the format information storage unit 21 of the master board 2, checks that the page change position information has been updated (pre-editing processing 20011 of the first page 2001 in FIG. 3 is completed), and then causes the pre-editing unit 13 to start the pre-editing processing of the second page 2002. When the pre-editing processing 20021 is completed, the editing unit 14 starts editing processing 20032 of the third page 2003.

When the editing processing 20032 is completed, the page change position 209 detected by the pre-editing unit 13 and the page change position 206 detected by the editing unit 14 are compared. In the example shown in FIG. 3, there should be no mismatch because the editing processing 20022 of the second page 2002 is already completed. The pre-editing unit 8 of the master board 2 checks that the pre-editing processing 20021 of the second page 2002 is completed and starts pre-editing processing 20031 of the third page.

In this way, instead of alternating processing between the master board 2 and the slave board 3, one of the two boards whose processor is free can start processing. In addition, when the pages are not delimited definitely, processing across two pages allows editing to be performed quickly with no need for synchronizing editing processing.

As shown in FIGS. 4A, 4B, and 4C, the receiving buffer 20 is managed in the ring buffer mode. The write pointer is updated by the receiver 4, while the read pointer is updated by the pre-editing unit 8 or 13 and by the editing unit 9 or 14 of each processor. The receiver 4 references these pointers to determine which area is being used for editing and into which

area data can be received.

In FIG. 4A, a write pointer 401 and a read pointer 402 point to the same position. This state indicates that data in the receiving buffer is not used for editing and that data can be received in any area in the buffer.

In FIGS. 4B and 4C, write pointers 404 and 405 and read pointers 403, 406, 407, and 408 point to different positions. In addition, there are a plurality of read pointers 403, 407, 406, and 408.

In this case, a search is made for a read pointer in the high-order physical address direction beginning with the position pointed to by the write pointer 404 or 405. If the read pointer is not found until the end address of the receiving buffer is reached, a search is made again beginning with the start address of the receiving buffer. Data are received into an area from the position pointed to by the write pointer to the position immediately preceding the position pointed to by the read pointer that is found first.

Conversely, an area being used for editing or an area whose data is not yet sent by the receiver 4 for editing begins with the position pointed to by the read pointer 403 or 406 that is detected first and ends with the position immediately preceding the position pointed to by the write pointer 404 or 405 that is found by making a search in the high-order address direction.

As described above, even when there are a plurality of processors and therefore there are a plurality of read pointers, the receiver 4 checks the write pointer and sends data, which is stored in the positions preceding the position pointed to by the write pointer, to the boards for processing. This



prevents editing processing from being performed on data beyond the position pointed to by the write pointer. Therefore, an area from the position pointed to by the lowest-address read pointer to the address pointed to by the write pointer is a memory area which is being used for editing or into which data has been received. This is an area from which the receiver 4 has not yet send data to the boards for editing.

Next, referring to FIG. 6, the following describes how processing is continued when a large amount of form data or external-character data is received and the receiving buffer becomes full.

When the receiver 4 of the master board 2 receives a large amount of form data or external-character data and a receiving buffer full condition occurs in which no free area is found in the receiving buffer 20, the receiver stops receiving data. At this time, the editing unit 9 of the master board 2 sends a data acquisition request 52 to the receiver 4 to perform editing processing for the nth page.

On the other hand, the pre-editing unit 13 of the slave board 3 sends a data acquisition request 51 for the nth page to the receiver 4 to perform pre-editing processing for the (n+1)th page.

In response to the data acquisition requests 51 and 52 from all processors, the receiver 4 performs data sending services 53 and 54 for the editing unit 9 of the master board 2 and for the pre-editing unit 13 of the slave board 3.

Next, the pre-editing unit 13 of the slave board 3 adds a receiving-buffer full parameter to a pre-editing end notification 58 and sends it to the receiver 4. At this time, the read pointer is not updated.

The pre-editing unit 13 of the slave board 3, which has not yet detected the page change position, sends a data acquisition request 57 to the receiver 4 again.

However, the receiver 4 which has no data to send cannot  
5 perform data sending service for the data acquisition request 57 received from the pre-editing unit 13 of the slave board 3.

After that, the editing unit 9 of the master board 2 sends an editing end notification 56 to the receiver 4 and updates  
10 the read pointer. Then, the editing unit sends a data acquisition request 55 to the receiver because one page of editing processing is not yet completed.

In response to the buffer full notification, the receiver 4 checks that data acquisition requests, 55 and 57, have been  
15 received from all processors. The receiver checks those requests to confirm that all processors has no received data to edit.

After confirming the requests from all processors, the receiver 4 issues a receiving-buffer data copy request to all  
20 processors, except the one that is performing editing processing, as a parameter of a data sending service 59 to ask each processor to receive data from the receiving buffer into the local memory of the processor. The receiver does not pass data to a processor which is performing editing processing  
25 because data is already copied into the local memory and there is no need to copy data any more. Upon receiving the request, the pre-editing unit 13 stores data into the local memory, informs the receiver 4, through a parameter of a pre-editing end notification 60, that the restoration of the  
30 receiving-buffer full condition is completed, and then updates

the read pointer.

The receiver 4, which has confirmed the notifications from all processors, resumes data reception and performs data sending services 61 and 62, each of which is not yet completed for a page, for the editing unit 9 of the master board 2 and the pre-editing unit 13 of the slave board 3.

The problem with a prior-art printer is that, when the page delimiter cannot be detected because the pre-editing unit 8 or 13 has not yet completed one page of pre-editing processing, subsequent editing processing cannot be performed. The printer described above prevents this condition from occurring.

As a second embodiment of the present invention, a printer 100 with a plurality of slave boards 3 will be described. FIG. 7 shows the configuration of the printer 100 with four slave boards 30, 31, 32, and 33. The operation will be described by referring to the timing chart shown in FIG. 8 and the data acquisition requests shown FIG. 9. In the example shown in FIG. 8, the first page 2001 contains double-sided printing data which takes long in drawing. The page change position of each page is not definite, and six pages of print data, page 2001 to page 2006, will be printed beginning with the master board 2.

The receiver 4 shown in FIG. 7 stores data 200 in the receiving buffer 20.

The pre-editing units of the master board 2 and all slave boards 30, 31, 32, and 33 send data acquisition requests 301, 302, 303, 304, and 305 to the receiver 4.

Upon recognizing the data acquisition requests from all processors, the receiver 4 performs the data sending services 311 and 312 to send the same data (start address of the receiving

buffer and the size) to the pre-editing unit 8 of the master board 2 and the pre-editing unit 13 of the slave board 30. Because there is no means for the pre-editing units to know which processor is to perform editing processing for the first page 2001, the receiver 4 notifies that editing processing will be performed by the master board 2 and that pre-editing processing will be performed by the slave board 30.

Because there is no data preceding the first page 2001, the pre-editing unit 8 of the master board 2 performs no processing but passes actual data to the editing unit 9 for performing editing processing.

The pre-editing unit 13 of the slave board 30 searches the format information on the first page 2001 for the page change position, stores the format information into the format information storage unit 23, and updates the format information in the format information storage unit 21 of the master board 2. The pre-editing unit also updates the read pointer of the receiving buffer 20 and informs the receiver 4 that the pre-editing processing of the first page 2001 has finished (321).

When the pre-editing processing of the first page 2001 in FIG. 8 is completed (321), the pre-editing unit 13 of the slave board 30 issues a data acquisition request 306 again as an editing request.

The receiver 4 allows the editing unit 14 of the slave board 30 to start the editing processing of the second page 2002 without waiting for the completion of the editing processing of the first page 2001.

In addition, the receiver 4 sends (340) data stored in the position pointed to by the updated read pointer and in the

following positions to the pre-editing unit 13 of the slave board 30 as the pre-editing data of the second page 2002.

When the editing processing on the master board 2 is completed (331), the page change position detected by the pre-editing unit 13 of the slave board 30 is compared with the page change position detected by the editing unit 9 to check if they are the same. When the page change positions differ and the page change position detected by the pre-editing unit 13 is nearer to the start of the acquired received data, information from the page change position detected by the pre-editing unit 13 to the page change position detected by the editing unit 9 is passed to the editing unit 14. Because the editing unit 14 performs extra editing, the editing data received from the editing unit 9 is deleted. Conversely, when the page change position detected by the editing unit 9 is nearer to the start of the receiving buffer, the editing unit 9 performs the editing processing of data from the page change position detected by the editing unit 9 to the page change position detected by the pre-editing unit 13 and passes the result to the editing unit 14 of the slave board 30.

In this way, by adjusting editing data with the other processor after completion of the editing processing, the page change position can be detected correctly although the immediately-preceding page and the currently-editing page are asynchronous and, at the same time, the correct format information can be passed.

Similarly, on the slave board 31, the editing data of the second page 2002 processed by the slave board 30 is compared with the page delimiter position detected by the pre-editing unit of the slave board 31 for corrected editing processing.

In this manner, even when the slave boards 30, 31, 32, and 33 are used, the operation is performed in the same manner as when the master board 2 and one slave board are used. Added processors reduce the load of each processor, thus improving performance.

5 In addition, referring to FIG. 10, the following describes how processing is continued when a large amount of form data or external-character data is received and the receiving buffer becomes full.

10 When the receiver 4 of the master board 2 receives a large amount of form data or external-character data and a receiving buffer full condition occurs in which no free area is found in the receiving buffer 20, the receiver stops receiving data. At this time, the editing unit 9 of the master board 2 sends a data acquisition request 301 to the receiver 4 to perform  
15 editing processing for the mth page.

The pre-editing unit 13 of the slave board 30 sends a data acquisition request 302 for the mth page to the receiver 4 to perform pre-editing processing for the editing processing of (m+1)th page. In response to the data acquisition requests  
20 301-305 from all processors, including the data acquisition requests 303-305 from the slave boards 31-33 which have already issued data acquisition requests, the receiver 4 performs data sending services 311 and 312 for the editing unit 9 of the master board 2 and for the pre-editing unit 13 of the slave board 30.

25 Next, the pre-editing unit 13 of the slave board 3 adds a receiving-buffer full parameter to a pre-editing end notification 321 and sends it to the receiver 4. At this time, the read pointer is not updated.

30 The pre-editing unit 13 of the slave board 3, which has not yet detected the page change position, sends a data

acquisition request 306 to the receiver 4 again. However, the receiver 4 which has no data to send cannot perform data sending service for the data acquisition request 306 received from the pre-editing unit 13 of the slave board 30.

5 After that, the editing unit 9 of the master board 2 sends an editing end notification 331 to the receiver 4 and updates the read pointer. Then, the editing unit sends a data acquisition request 307 to the receiver because one page of editing processing is not yet completed.

10 In response to the buffer full notification, the receiver 4 checks that data acquisition requests 307, 306, 303, 304, and 305 have been received from all processors. The receiver checks those requests to confirm that all processors has no received data to edit.

15 After confirming the requests from all processors, the receiver 4 issues receiving-buffer data copy requests 313, 314, 315, and 316 to all processors, except the one that is performing editing processing, as a parameter of data sending services 313, 314, 315, and 316 to ask each processor to receive data  
20 from the receiving buffer 20 into the local memory of the processor. The receiver does not pass data to a processor which is performing editing processing because data is already copied into the local memory and there is no need to copy data any more.

25 Upon receiving the request, the pre-editing unit 13 of the slave board 30, the pre-editing unit (not shown) of the slave board 31, the pre-editing unit (not shown) of the slave board 32, and the pre-editing unit (not shown) of the slave board 33 store data into the local memory, inform the receiver  
30 4, through a parameter of pre-editing end notifications 322,

323, 324, and 325, that the restoration of the receiving-buffer full condition is completed, and then updates the read pointer.

The receiver 4, which has confirmed the notifications from all processors, resumes data reception and performs data sending service 317, which is not yet completed for one full page, for the editing unit 9 of the master board 2 and the pre-editing unit 13 of the slave board 30.

As described above, reception processing and video output processing are executed in the DMA mode. Therefore, the page-basis parallel processing, from editing to drawing, is performed in parallel, and most of the processing time is used for parallel processing. This means that performance increases as more slave boards are used. Therefore, the number of slave boards should be decreased for low-speed engines, and increased for high-speed engines, to enable the same algorithm to cover a wide range of printers, from low-speed to high-speed.

In addition, the programmable configuration of a user interface 5 and the output controller 6 shown in FIG. 1 and the definite definition of an interface (data exchange protocol) between the basic unit 7 and the processing unit allow the same algorithm to implement the function by simply changing the user interface 5 and the output controller 6 with no effect on other processing units even when the specifications of the operator panel 18 and the printer engine 19 are changed.

The operation of the output controller 6 in the printer configuration shown in FIGS. 11A and 11B will be described. Each of the two printer engines in this example has its own print order during double-sided printing. FIG. 11A shows printer A with a printer engine whose paper transport path is short. The printer transports two pieces of paper at a time.



In this printer A, the first paper is supplied and print data is fixed on the face of the first paper transported in the direction of arrow 501, and the paper is transported in the direction of arrow 502. Next, the second paper is supplied in the direction of arrow 501, print data is fixed on the face of the second paper, and the paper is transported in the direction of arrow 502. After that, the first paper is transported in the direction of arrow 503, print data is fixed on the reverse of the first paper, and the paper is ejected in the direction of arrow 504. Finally, print data is fixed on the reverse of the second paper, and the paper is ejected in the direction of arrow 504. In this way, the print order is the face of the first paper, the face of the second paper, the reverse of the first paper, the reverse of the second paper, the face of the third paper, and so on.

FIG. 11B shows printer B with a printer engine whose paper transport path is long. This printer transports three pieces of paper at a time. In this printer B, the first paper is supplied, print data is fixed on the face of the first paper transported in the direction of arrow 601, and the paper is transported in the direction of arrow 602. Next, the second paper is supplied in the direction of arrow 601, print data is fixed on the face of the second paper, and the paper is transported in the direction of arrow 602. At this time, the first paper is transported in the direction of arrow 603. Then, the third paper is supplied in the direction of arrow 601. After that, the transportation operations of the three pieces of paper in printer B are interrelated. That is, when the first paper is supplied in the direction of arrow 604, the second paper is transported in the direction of arrow 603, the third paper is

transported in the direction of arrow 602, and print data is fixed on the reverse of each paper. After printed data is fixed, the papers are transported in the direction of arrows 605 and 606 and reverse-ejected. In this case, the print order is the reverse of the first paper, the reverse of the second paper, the reverse of the third paper, the face of the first paper, the face of the second paper, the face of the third paper, the reverse of the fourth paper, and so on. For a printer engine with a feature that does not reverse-eject papers to increase print performance (paper is transported in the direction of arrow 607), the print order is the face of the first paper, the face of the second paper, the face of the third paper, the reverse of the first paper, the reverse of the second paper, the reverse of the third paper, the face of the fourth paper, and so on. The print order is one of control methods for maximizing the print performance of the printer. For data requiring long in editing or drawing such as the one shown in FIG. 4 or FIG. 8 or for two pages of data (one piece of paper), another control method may be used. Considering all these cases, print data is queued on a page basis with the print order controlled by pointers. This allows pages to be re-ordered simply by changing the queue (pointers), making the management easy.

A plurality of programs may be prepared for the user interface 5 and the output controller 6 to allow a program best suited for the device configuration to be selected.

As described above, the printer according to the present invention eliminates the need for replacing, via the printer driver or the data filter, existing line-printer user data with data coded in page printer description language, enabling a

page printer to print data quickly and correctly. In addition,  
even when a large amount of form data or external character  
data exceeding the receiving buffer size is received, the  
printer may continue printing without having to check whether  
5 editing is completed for one full page.

While this invention has been described in conjunction  
with the preferred embodiments described above, it will now  
be possible for those skilled in the art to put this invention  
10 into practice in various other manners.

11  
12  
13  
14  
15  
16  
17  
18  
19  
20  
21  
22  
23  
24  
25  
26  
27  
28  
29  
30  
31  
32  
33  
34  
35  
36  
37  
38  
39  
40  
41  
42  
43  
44  
45  
46  
47  
48  
49  
50  
51  
52  
53  
54  
55  
56  
57  
58  
59  
60  
61  
62  
63  
64  
65  
66  
67  
68  
69  
70  
71  
72  
73  
74  
75  
76  
77  
78  
79  
80  
81  
82  
83  
84  
85  
86  
87  
88  
89  
90  
91  
92  
93  
94  
95  
96  
97  
98  
99  
100  
101  
102  
103  
104  
105  
106  
107  
108  
109  
110  
111  
112  
113  
114  
115  
116  
117  
118  
119  
120  
121  
122  
123  
124  
125  
126  
127  
128  
129  
130  
131  
132  
133  
134  
135  
136  
137  
138  
139  
140  
141  
142  
143  
144  
145  
146  
147  
148  
149  
150  
151  
152  
153  
154  
155  
156  
157  
158  
159  
160  
161  
162  
163  
164  
165  
166  
167  
168  
169  
170  
171  
172  
173  
174  
175  
176  
177  
178  
179  
180  
181  
182  
183  
184  
185  
186  
187  
188  
189  
190  
191  
192  
193  
194  
195  
196  
197  
198  
199  
200  
201  
202  
203  
204  
205  
206  
207  
208  
209  
210  
211  
212  
213  
214  
215  
216  
217  
218  
219  
220  
221  
222  
223  
224  
225  
226  
227  
228  
229  
230  
231  
232  
233  
234  
235  
236  
237  
238  
239  
240  
241  
242  
243  
244  
245  
246  
247  
248  
249  
250  
251  
252  
253  
254  
255  
256  
257  
258  
259  
260  
261  
262  
263  
264  
265  
266  
267  
268  
269  
270  
271  
272  
273  
274  
275  
276  
277  
278  
279  
280  
281  
282  
283  
284  
285  
286  
287  
288  
289  
290  
291  
292  
293  
294  
295  
296  
297  
298  
299  
300  
301  
302  
303  
304  
305  
306  
307  
308  
309  
310  
311  
312  
313  
314  
315  
316  
317  
318  
319  
320  
321  
322  
323  
324  
325  
326  
327  
328  
329  
330  
331  
332  
333  
334  
335  
336  
337  
338  
339  
340  
341  
342  
343  
344  
345  
346  
347  
348  
349  
350  
351  
352  
353  
354  
355  
356  
357  
358  
359  
360  
361  
362  
363  
364  
365  
366  
367  
368  
369  
370  
371  
372  
373  
374  
375  
376  
377  
378  
379  
380  
381  
382  
383  
384  
385  
386  
387  
388  
389  
390  
391  
392  
393  
394  
395  
396  
397  
398  
399  
400  
401  
402  
403  
404  
405  
406  
407  
408  
409  
410  
411  
412  
413  
414  
415  
416  
417  
418  
419  
420  
421  
422  
423  
424  
425  
426  
427  
428  
429  
430  
431  
432  
433  
434  
435  
436  
437  
438  
439  
440  
441  
442  
443  
444  
445  
446  
447  
448  
449  
450  
451  
452  
453  
454  
455  
456  
457  
458  
459  
460  
461  
462  
463  
464  
465  
466  
467  
468  
469  
470  
471  
472  
473  
474  
475  
476  
477  
478  
479  
480  
481  
482  
483  
484  
485  
486  
487  
488  
489  
490  
491  
492  
493  
494  
495  
496  
497  
498  
499  
500  
501  
502  
503  
504  
505  
506  
507  
508  
509  
510  
511  
512  
513  
514  
515  
516  
517  
518  
519  
520  
521  
522  
523  
524  
525  
526  
527  
528  
529  
530  
531  
532  
533  
534  
535  
536  
537  
538  
539  
540  
541  
542  
543  
544  
545  
546  
547  
548  
549  
550  
551  
552  
553  
554  
555  
556  
557  
558  
559  
560  
561  
562  
563  
564  
565  
566  
567  
568  
569  
570  
571  
572  
573  
574  
575  
576  
577  
578  
579  
580  
581  
582  
583  
584  
585  
586  
587  
588  
589  
590  
591  
592  
593  
594  
595  
596  
597  
598  
599  
600  
601  
602  
603  
604  
605  
606  
607  
608  
609  
610  
611  
612  
613  
614  
615  
616  
617  
618  
619  
620  
621  
622  
623  
624  
625  
626  
627  
628  
629  
630  
631  
632  
633  
634  
635  
636  
637  
638  
639  
640  
641  
642  
643  
644  
645  
646  
647  
648  
649  
650  
651  
652  
653  
654  
655  
656  
657  
658  
659  
660  
661  
662  
663  
664  
665  
666  
667  
668  
669  
670  
671  
672  
673  
674  
675  
676  
677  
678  
679  
680  
681  
682  
683  
684  
685  
686  
687  
688  
689  
690  
691  
692  
693  
694  
695  
696  
697  
698  
699  
700  
701  
702  
703  
704  
705  
706  
707  
708  
709  
710  
711  
712  
713  
714  
715  
716  
717  
718  
719  
720  
721  
722  
723  
724  
725  
726  
727  
728  
729  
730  
731  
732  
733  
734  
735  
736  
737  
738  
739  
740  
741  
742  
743  
744  
745  
746  
747  
748  
749  
750  
751  
752  
753  
754  
755  
756  
757  
758  
759  
760  
761  
762  
763  
764  
765  
766  
767  
768  
769  
770  
771  
772  
773  
774  
775  
776  
777  
778  
779  
780  
781  
782  
783  
784  
785  
786  
787  
788  
789  
790  
791  
792  
793  
794  
795  
796  
797  
798  
799  
800  
801  
802  
803  
804  
805  
806  
807  
808  
809  
810  
811  
812  
813  
814  
815  
816  
817  
818  
819  
820  
821  
822  
823  
824  
825  
826  
827  
828  
829  
830  
831  
832  
833  
834  
835  
836  
837  
838  
839  
840  
841  
842  
843  
844  
845  
846  
847  
848  
849  
850  
851  
852  
853  
854  
855  
856  
857  
858  
859  
860  
861  
862  
863  
864  
865  
866  
867  
868  
869  
870  
871  
872  
873  
874  
875  
876  
877  
878  
879  
880  
881  
882  
883  
884  
885  
886  
887  
888  
889  
890  
891  
892  
893  
894  
895  
896  
897  
898  
899  
900  
901  
902  
903  
904  
905  
906  
907  
908  
909  
910  
911  
912  
913  
914  
915  
916  
917  
918  
919  
920  
921  
922  
923  
924  
925  
926  
927  
928  
929  
930  
931  
932  
933  
934  
935  
936  
937  
938  
939  
940  
941  
942  
943  
944  
945  
946  
947  
948  
949  
950  
951  
952  
953  
954  
955  
956  
957  
958  
959  
960  
961  
962  
963  
964  
965  
966  
967  
968  
969  
970  
971  
972  
973  
974  
975  
976  
977  
978  
979  
980  
981  
982  
983  
984  
985  
986  
987  
988  
989  
990  
991  
992  
993  
994  
995  
996  
997  
998  
999  
1000  
1001  
1002  
1003  
1004  
1005  
1006  
1007  
1008  
1009  
1010  
1011  
1012  
1013  
1014  
1015  
1016  
1017  
1018  
1019  
1020  
1021  
1022  
1023  
1024  
1025  
1026  
1027  
1028  
1029  
1030  
1031  
1032  
1033  
1034  
1035  
1036  
1037  
1038  
1039  
1040  
1041  
1042  
1043  
1044  
1045  
1046  
1047  
1048  
1049  
1050  
1051  
1052  
1053  
1054  
1055  
1056  
1057  
1058  
1059  
1060  
1061  
1062  
1063  
1064  
1065  
1066  
1067  
1068  
1069  
1070  
1071  
1072  
1073  
1074  
1075  
1076  
1077  
1078  
1079  
1080  
1081  
1082  
1083  
1084  
1085  
1086  
1087  
1088  
1089  
1090  
1091  
1092  
1093  
1094  
1095  
1096  
1097  
1098  
1099  
1100  
1101  
1102  
1103  
1104  
1105  
1106  
1107  
1108  
1109  
1110  
1111  
1112  
1113  
1114  
1115  
1116  
1117  
1118  
1119  
1120  
1121  
1122  
1123  
1124  
1125  
1126  
1127  
1128  
1129  
1130  
1131  
1132  
1133  
1134  
1135  
1136  
1137  
1138  
1139  
1140  
1141  
1142  
1143  
1144  
1145  
1146  
1147  
1148  
1149  
1150  
1151  
1152  
1153  
1154  
1155  
1156  
1157  
1158  
1159  
1160  
1161  
1162  
1163  
1164  
1165  
1166  
1167  
1168  
1169  
1170  
1171  
1172  
1173  
1174  
1175  
1176  
1177  
1178  
1179  
1180  
1181  
1182  
1183  
1184  
1185  
1186  
1187  
1188  
1189  
1190  
1191  
1192  
1193  
1194  
1195  
1196  
1197  
1198  
1199  
1200  
1201  
1202  
1203  
1204  
1205  
1206  
1207  
1208  
1209  
1210  
1211  
1212  
1213  
1214  
1215  
1216  
1217  
1218  
1219  
1220  
1221  
1222  
1223  
1224  
1225  
1226  
1227  
1228  
1229  
1230  
1231  
1232  
1233  
1234  
1235  
1236  
1237  
1238  
1239  
1240  
1241  
1242  
1243  
1244  
1245  
1246  
1247  
1248  
1249  
1250  
1251  
1252  
1253  
1254  
1255  
1256  
1257  
1258  
1259  
1260  
1261  
1262  
1263  
1264  
1265  
1266  
1267  
1268  
1269  
1270  
1271  
1272  
1273  
1274  
1275  
1276  
1277  
1278  
1279  
1280  
1281  
1282  
1283  
1284  
1285  
1286  
1287  
1288  
1289  
1290  
1291  
1292  
1293  
1294  
1295  
1296  
1297  
1298  
1299  
1300  
1301  
1302  
1303  
1304  
1305  
1306  
1307  
1308  
1309  
1310  
1311  
1312  
1313  
1314  
1315  
1316  
1317  
1318  
1319  
1320  
1321  
1322  
1323  
1324  
1325  
1326  
1327  
1328  
1329  
1330  
1331  
1332  
1333  
1334  
1335  
1336  
1337  
1338  
1339  
1340  
1341  
1342  
1343  
1344  
1345  
1346  
1347  
1348  
1349  
1350  
1351  
1352  
1353  
1354  
1355  
1356  
1357  
1358  
1359  
1360  
1361  
1362  
1363  
1364  
1365  
1366  
1367  
1368  
1369  
1370  
1371  
1372  
1373  
1374  
1375  
1376  
1377  
1378  
1379  
1380  
1381  
1382  
1383  
1384  
1385  
1386  
1387  
1388  
1389  
1390  
1391  
1392  
1393  
1394  
1395  
1396  
1397  
1398  
1399  
1400  
1401  
1402  
1403  
1404  
1405  
1406  
1407  
1408  
1409  
1410  
1411  
1412  
1413  
1414  
1415  
1416  
1417  
1418  
1419  
1420  
1421  
1422  
1423  
1424  
1425  
1426  
1427  
1428  
1429  
1430  
1431  
1432  
1433  
1434  
1435  
1436  
1437  
1438  
1439  
1440  
1441  
1442  
1443  
1444  
1445  
1446  
1447  
1448  
1449  
1450  
1451  
1452  
1453  
1454  
1455  
1456  
1457  
1458  
1459  
1460  
1461  
1462  
1463  
1464  
1465  
1466  
1467  
1468  
1469  
1470  
1471  
1472  
1473  
1474  
1475  
1476  
1477  
1478  
1479  
1480  
1481  
1482  
1483  
1484  
1485  
1486  
1487  
1488  
1489  
1490  
1491  
1492  
1493  
1494  
1495  
1496  
1497  
1498  
1499  
1500  
1501  
1502  
1503  
1504  
1505  
1506  
1507  
1508  
1509  
1510  
1511  
1512  
1513  
1514  
1515  
1516  
1517  
1518  
1519  
1520  
1521  
1522  
1523  
1524  
1525  
1526  
1527  
1528  
1529  
1530  
1531  
1532  
1533  
1534  
1535  
1536  
1537  
1538  
1539  
1540  
1541  
1542  
1543  
1544  
1545  
1546  
1547  
1548  
1549  
1550  
1551  
1552  
1553  
1554  
1555  
1556  
1557  
1558  
1559  
1560  
1561  
1562  
1563  
1564  
1565  
1566  
1567  
1568  
1569  
1570  
1571  
1572  
1573  
1574  
1575  
1576  
1577  
1578  
1579  
1580  
1581  
1582  
1583  
1584  
1585  
1586  
1587  
1588  
1589  
1590  
1591  
1592  
1593  
1594  
1595  
1596  
1597  
1598  
1599  
1600  
1601  
1602  
1603  
1604  
1605  
1606  
1607  
1608  
1609  
1610  
1611  
1612  
1613  
1614  
1615  
1616  
1617  
1618  
1619  
1620  
1621  
1622  
1623  
1624  
1625  
1626  
1627  
1628  
1629  
1630  
1631  
1632  
1633  
1634  
1635  
1636  
1637  
1638  
1639  
1640  
1641  
1642  
1643  
1644  
1645  
1646  
1647  
1648  
1649  
1650  
1651  
1652  
1653  
1654  
1655  
1656  
1657  
1658  
1659  
1660  
1661  
1662  
1663  
1664  
1665  
1666  
1667  
1668  
1669  
1670  
1671  
1672  
1673  
1674  
1675  
1676  
1677  
1678  
1679  
1680  
1681  
1682  
1683  
1684  
1685  
1686  
1687  
1688  
1689  
1690  
1691  
1692  
1693  
1694  
1695  
1696  
1697  
1698  
1699  
1700  
1701  
1702  
1703  
1704  
1705  
1706  
1707  
1708  
1709  
1710  
1711  
1712  
1713  
1714  
1715  
1716  
1717  
1718  
1719  
1720  
1721  
1722  
1723  
1724  
1725  
1726  
1727  
1728  
1729  
1730  
1731  
1732  
1733  
1734  
1735  
1736  
1737  
1738  
1739  
1740  
1741  
1742  
1743  
1744  
1745  
1746  
1747  
1748  
1749  
1750  
1751  
1752  
1753  
1754  
1755  
1756  
1757  
1758  
1759  
1760  
1761  
1762  
1763  
1764  
1765  
1766  
1767  
1768  
1769  
1770  
1771  
1772  
1773  
1774  
1775  
1776  
1777  
1778  
1779  
1780  
1781  
1782  
1783  
1784  
1785  
1786  
1787  
1788  
1789  
1790  
1791  
1792  
1793  
1794  
1795  
1796  
1797  
1798  
1799  
1800  
1801  
1802  
1803  
1804  
1805  
1806  
1807  
1808  
1809  
1810  
1811  
1812  
1813  
1814  
1815  
1816  
1817  
1818  
1819  
1820  
1821  
1822  
1823  
1824  
1825  
1826  
1827  
1828  
1829  
1830  
1831  
1832  
1833  
1834  
1835  
1836  
1837  
1838  
1839  
1840  
1841  
1842  
1843  
1844  
1845  
1846  
1847  
1848  
1849  
1850  
1851  
1852  
1853  
1854  
1855  
1856  
1857  
1858  
1859  
1860  
1861  
1862  
1863  
1864  
1865  
1866  
1867  
1868  
1869  
1870  
1871  
1872  
1873  
1874  
1875  
1876  
1877  
1878  
1879  
1880  
1881  
1882  
1883  
1884  
1885  
1886  
1887  
1888  
1889  
1890  
1891  
1892  
1893  
1894  
1895  
1896  
1897  
1898  
1899  
1900  
1901  
1902  
1903  
1904  
1905  
1906  
1907  
1908  
1909  
1910  
1911  
1912  
1913  
1914  
1915  
1916  
1917  
1918  
1919  
1920  
1921  
1922  
1923  
1924  
1925  
1926  
1927  
1928  
1929  
1930  
1931  
1932  
1933  
1934  
1935  
1936  
1937  
1938  
1939  
1940  
1941  
1942  
1943  
1944  
1945  
1946  
1947  
1948  
1949  
1950  
1951  
1952  
1953  
1954  
1955  
1956  
1957  
1958  
1959  
1960  
1961  
1962  
1963  
1964  
1965  
1966  
1967  
1968  
1969  
1970  
1971  
1972  
1973  
1974  
1975  
1976  
1977  
1978  
1979  
1980  
1981  
1982  
1983  
1984  
1985  
1986  
1987  
1988  
1989  
1990  
1991  
1992  
1993  
1994  
1995  
1996  
1997  
1998  
1999  
2000  
2001  
2002  
2003  
2004  
2005  
2006  
2007  
2008  
2009  
2010  
2011  
2012  
2013  
2014  
2015  
2016  
2017  
2018  
2019  
2020  
2021  
2022  
2023  
2024  
2025  
2026  
2027  
2028  
2029  
2030  
2031  
2032  
2033  
2034  
2035  
2036  
2037  
2038  
2039  
2040  
2041  
2042  
2043  
2044  
2045  
2046  
2047  
2048  
2049  
2050  
2051  
2052  
2053  
2054  
2055  
2056  
2057  
2058  
2059  
2060  
2061  
2062  
2063  
2064  
2065  
2066  
2067  
2068  
2069  
2070  
2071  
2072  
2073  
2074  
2075  
2076  
2077  
2078  
2079  
2080  
2081  
2082  
2083  
2084  
2085  
2086  
2087  
2088  
2089  
2090  
2091  
2092  
2093  
2094  
2095  
2096  
2097  
2098  
2099  
2100  
2101  
2102  
2103  
2104  
2105  
2106  
2107  
2108  
2109  
2110  
2111  
2112  
2113  
2114  
2115  
2116  
2117  
2118  
2119  
2120  
2121  
2122  
2123  
2124  
2125  
2126  
2127  
2128  
2129  
2130  
2131  
2132  
2133  
2134  
2135  
2136  
2137  
2138  
2139  
2140  
2141  
2142  
2143  
2144  
2145  
2146  
2147  
2148  
2149  
2150  
2151  
2152  
2153  
2154  
2155  
2156  
2157  
2158  
2159  
2160  
2161  
2162  
2163  
2164  
2165  
2166  
2167  
2168  
2169  
2170  
2171  
2172  
2173  
2174  
2175  
2176  
2177  
2178  
2179  
2180  
2181  
2182  
2183  
2184  
2185  
2186  
2187  
2188  
2189  
2190  
2191  
2192  
2193  
2194  
2195  
2196  
2197  
2198  
2199  
2200  
2201  
2202  
2203  
2204  
2205  
2206  
2207  
2208  
2209  
2210  
2211  
2212  
2213  
2214  
2215  
2216  
221

What is claimed is:

1 1. A printer which draws page data for outputting one page at  
2 a time, the page data being edited from line printer output  
3 format to a page format based on format information,  
4 comprising:

5 one master board and one or more slave boards each  
6 executing:

7 pre-editing processing in which a temporary page change  
8 position delimiting pages is calculated with the data unedited;

9 editing processing in which data in a next page following

10 the temporary page change position is edited based on the format  
11 information to define an actual page change position and the  
12 temporary page change position is corrected by the actual page  
13 change position to define the page data of the next page; and

14 drawing processing in which the page data is drawn,

15 wherein said master board and slave boards execute the  
16 pre-editing processing of the data before the editing  
17 processing and the drawing processing.

1 2. The printer according to claim 1, wherein

2 said master board comprises:

3 a basic unit transferring the data and control  
4 information to or from processing units and to or from said  
5 slave boards,

6 wherein said processing units, all connected to said  
7 basic unit, include:

8 a receiver which receives the data from a host computer;

9 a receiving buffer in which the data is stored;

10 a pre-editing unit which acquires data from said  
11 receiving buffer and calculates the temporary page change

12. position;

13           a second format information storage unit in which format  
14 information on a next page following the temporary page change  
15 position is stored;

16           a first format information storage unit in which format  
17 information common to edited pages is accumulated by obtaining  
18 the format information on the edited pages from said second  
19 format information storage unit;

20           an editing unit which edits the next page following the  
21 temporary page change position defined by said pre-editing unit  
22 to define the actual page change position based on the format  
23 information stored in said first and second format information  
24 storage units, corrects the temporary page change position with  
25 the actual page change position, and defines the page data of  
26 the next page;

27           a drawing unit which generates drawing data from the page  
28 data;

29           a print controller which converts the drawing data into  
30 video output data;

31           an output controller which transfers the video output  
32 data sent from said print controller and from a print controller  
33 of said slave boards to a printer engine to manage a page of  
34 the video output data; and

35           a user interface which sends or receives operation  
36 information to or from an operator panel operated by a user.

1   3. The printer according to claim 1, wherein

2       each of said slave boards comprises:

3       a basic unit transferring the data and control  
4 information to or from processing units and to or from said

5. master board,

6 wherein said processing units, all connected to said  
7 basic unit, include:

8 a pre-editing unit which calculates the temporary page  
9 change position of data acquired from a receiving buffer;

10 a second format information storage unit in which format  
11 information on a next page following the temporary page change  
12 position is stored;

13 an editing unit which edits the next page to define the  
14 actual page change position based on the format information  
15 stored in a first format storage unit in which common format  
16 information is stored and in said second format information  
17 storage unit, corrects the temporary page change position with  
18 the actual page change position, and defines the page data of  
19 the next page;

20 a drawing unit which generates drawing data from the page  
21 data; and

22 a print controller which converts the drawing data into  
23 video output data.

1 4. The printer according to claim 2, wherein

2 said receiving buffer cyclically uses a buffer area in  
3 which data from the host computer is stored and an area which  
4 is used for the editing processing and, when the buffer becomes  
5 full before the page change position is detected during the  
6 editing processing, stops receiving the data and synchronizes  
7 the format information by distributing the so-far received data  
8 among the master board and the slave board to avoid a buffer  
9 overflow and to continue processing.

1 5. The printer according to claim 1, wherein  
2       said pre-editing unit checks whether or not statements  
3 coded in a page printer description language are present and,  
4 when statements coded in the page printer description language  
5 are found, defines a position defined by page change  
6 information as the page change position and, when there is no  
7 statement coded in the page printer description language,  
8 calculates the temporary page change position from a number  
9 of characters and a number of lines, the temporary page change  
10 position delimiting pages.

1 6. The printer according to claim 2, wherein the common format  
2 information, which is the format information passed across  
3 edited pages, includes character pitch information, character  
4 size information, left margin information, right margin  
5 information, horizontal tab information, vertical tab  
6 information, line feeding information, font information,  
7 character decoration information, paper size information,  
8 print orientation information, number-of-copies information,  
9 form information, external character definition information,  
10 and page change information.

1 7. A printer comprising:  
2       two or more boards, each comprising:  
3       a pre-editing unit which performs pre-editing processing  
4 in which, in order to delimit received data into pages, format  
5 information is extracted from a start of non-delimited data  
6 beginning with the start of the received data and a temporary  
7 page change position is calculated, said temporary page change  
8 position being a trailing end of a page whose leading end is

9. the start of the non-delimited data;

10        an editing unit which performs editing processing in  
11 which data following the temporary page change position is  
12 edited and an actual page change position is calculated to  
13 output editing data of a page, said actual page change position  
14 being an actual trailing end of the page whose leading end is  
15 the temporary page change position; and

16        a drawing unit which performs drawing processing in which  
17 the edited data is drawn and video output data is generated,  
18        wherein, when a pre-editing unit of a first board  
19 completes first pre-editing processing, a pre-editing unit of  
20 a second board where none of pre-editing processing, editing  
21 processing, and drawing processing is performed starts  
22 pre-editing processing in which, even if the first editing  
23 processing calculating an actual page change position of a page  
24 whose temporary page change position was calculated by the  
25 first pre-editing processing is not yet completed, a temporary  
26 page change position of a page beginning with the temporary  
27 page change position calculated by the first pre-editing  
28 processing is calculated.

1    8. The printer according to claim 7, further comprising format  
2 information storage units in which format information and page  
3 change position information included in received data and  
4 obtained by the pre-editing processing and the editing  
5 processing are stored, wherein

6        said pre-editing unit updates, during the pre-editing  
7 processing, the information stored in said format information  
8 storage units based on the format information extracted from  
9 data of a page whose leading end is the start of non-delimited



10 data and on said temporary page change position, and  
 11 said editing unit updates the information stored in said  
 12 format information storage units based on the format  
 13 information obtained by editing the data of the page whose  
 14 leading end is the temporary page change position and on the  
 15 actual page change position.

1 9. The printer according to claim 8, wherein, after said editing  
 2 unit calculated an actual page change position of a page, and  
 3 when an actual page change position of a preceding page of said  
 4 page is calculated, said editing unit calculates the actual  
 5 page executes the process of:

6 (a) calculating an actual trailing end of said page based  
 7 on the actual page change position of the preceding page,  
 8 (b) correcting the temporary page change position and the  
 9 actual page change position calculated of said page based  
 10 on said actual trailing end,  
 11 (c) updating the format information stored in said format  
 12 information storage units based on the actual page change  
 13 position of the preceding page and the corrected actual  
 14 page change position, and  
 15 (d) outputting editing data existing from the actual page  
 16 change position to the corrected page change position.

1 10. The printer according to claim 8, wherein, when the  
 2 pre-editing processing is completed, said pre-editing unit  
 3 does not update the format information stored in the format  
 4 information storage units but completes the pre-editing  
 5 processing if the editing processing calculating the actual  
 6 page change position corresponding to the calculated page

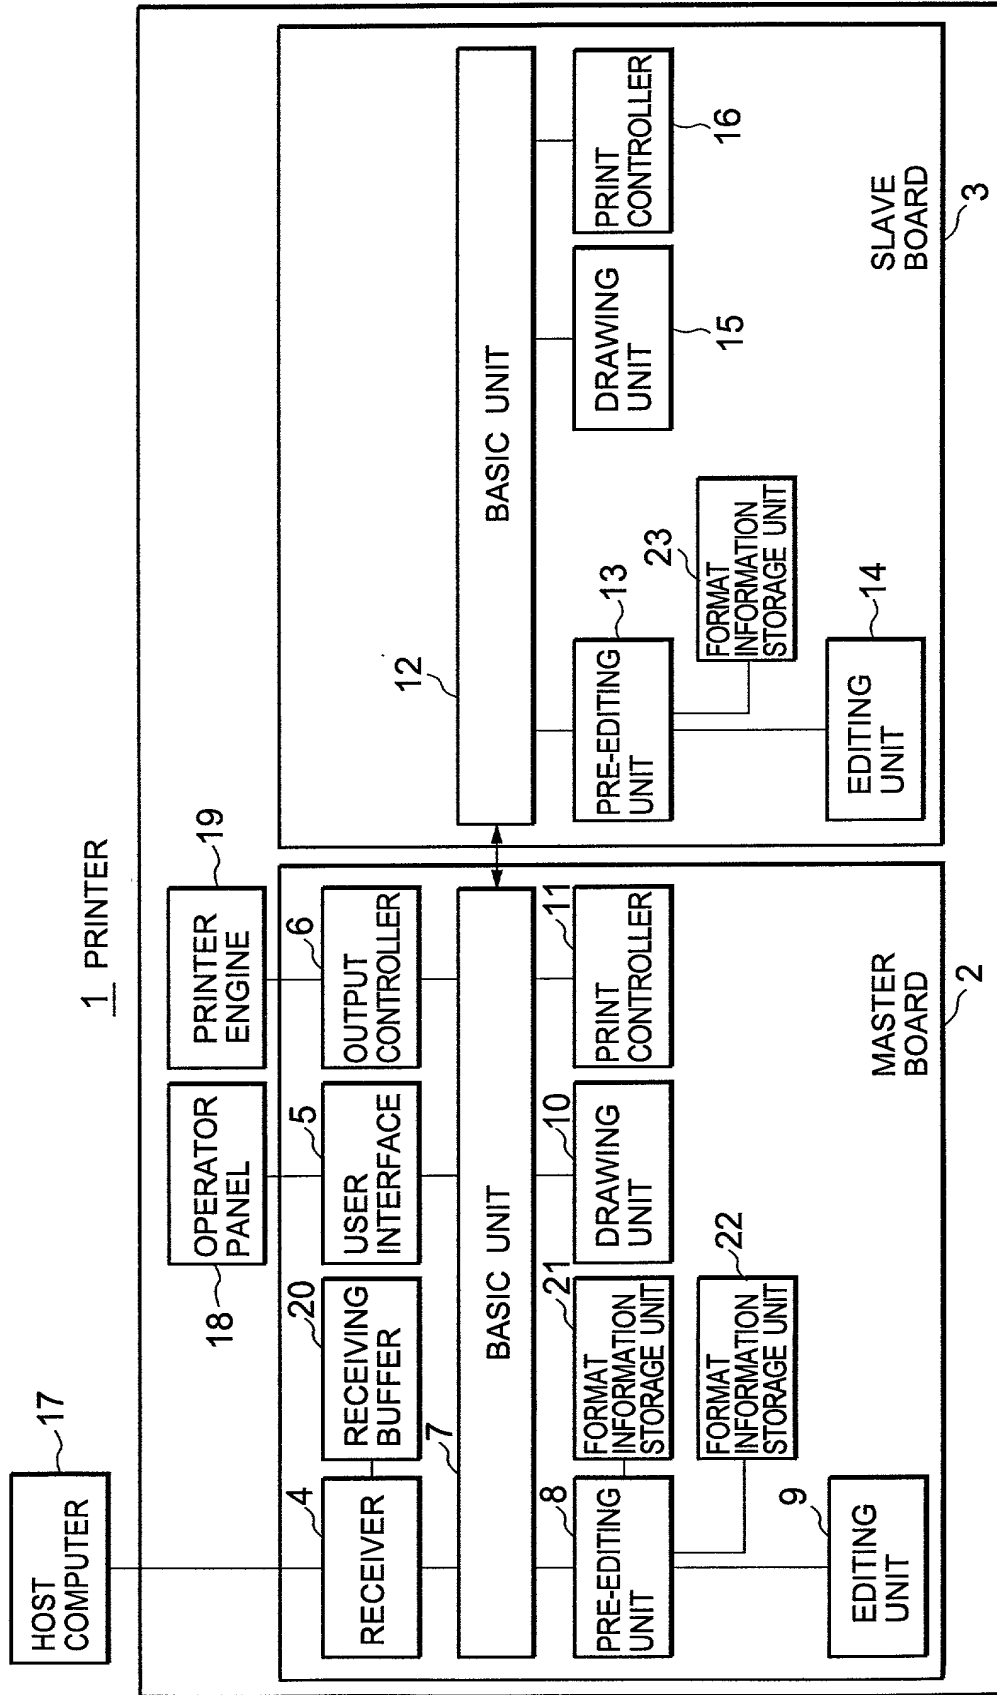
7

[illegible]

## ABSTRACT OF THE DISCLOSURE

A printer has two or more boards. Each board comprises a pre-editing unit which extracts format information from the start of non-delimited received data to sequentially delimit the data into pages beginning with the start of the received data and calculates a temporary page change position that is the trailing end of one page whose start is the leading end of the non-delimited data, an editing unit which edits data following the temporary page change position, calculates an actual page change position that is the trailing end of one page whose leading end is the temporary page change position, and outputs the editing data of the page, and a drawing unit which performs drawing processing in which the editing data is drawn and video output data is output. In addition, when the pre-editing unit of a board completes pre-editing processing, the pre-editing unit of some other board, on which none of pre-editing processing, editing processing, and drawing processing is performed, starts pre-editing processing for calculating a temporary page change position of the next page even if editing processing calculating an actual page change position of the page, for which the temporary page change was calculated by the pre-editing processing, is not yet completed.

FIG.1



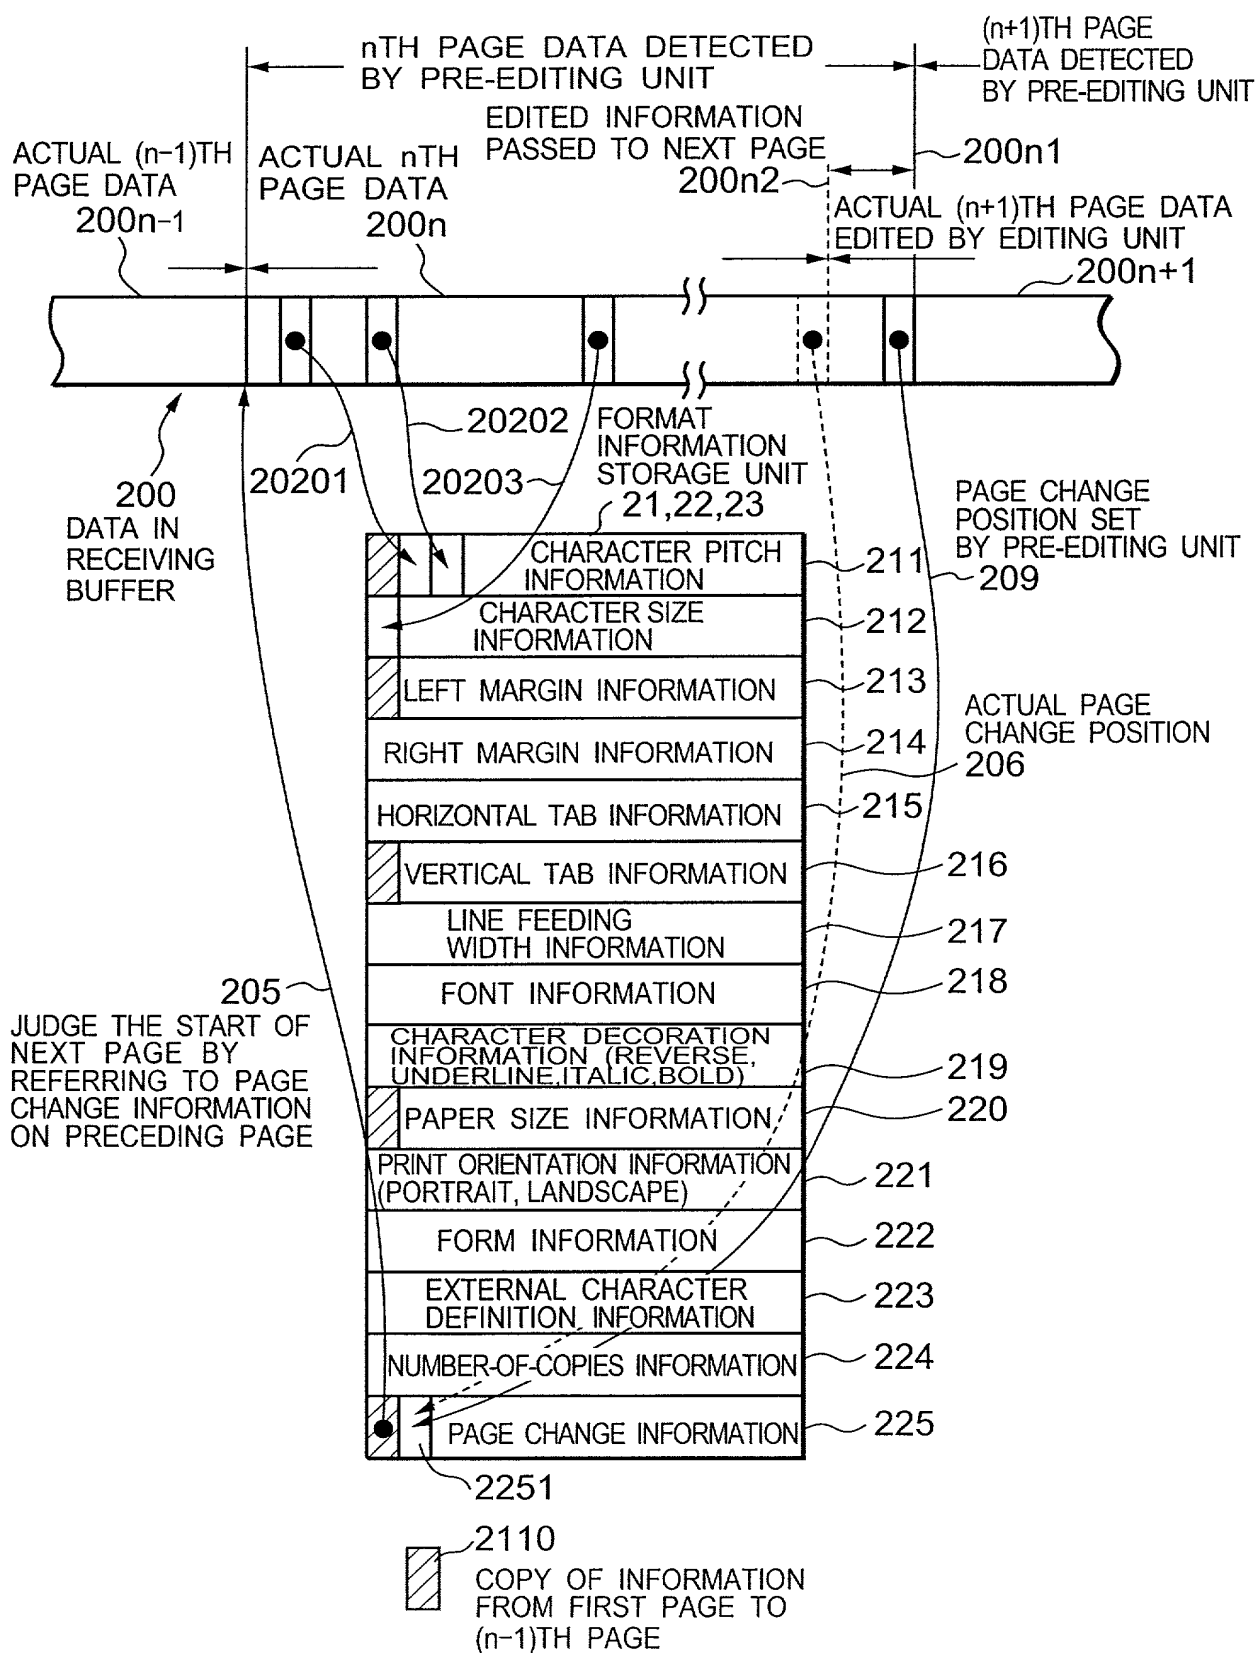


FIG.3

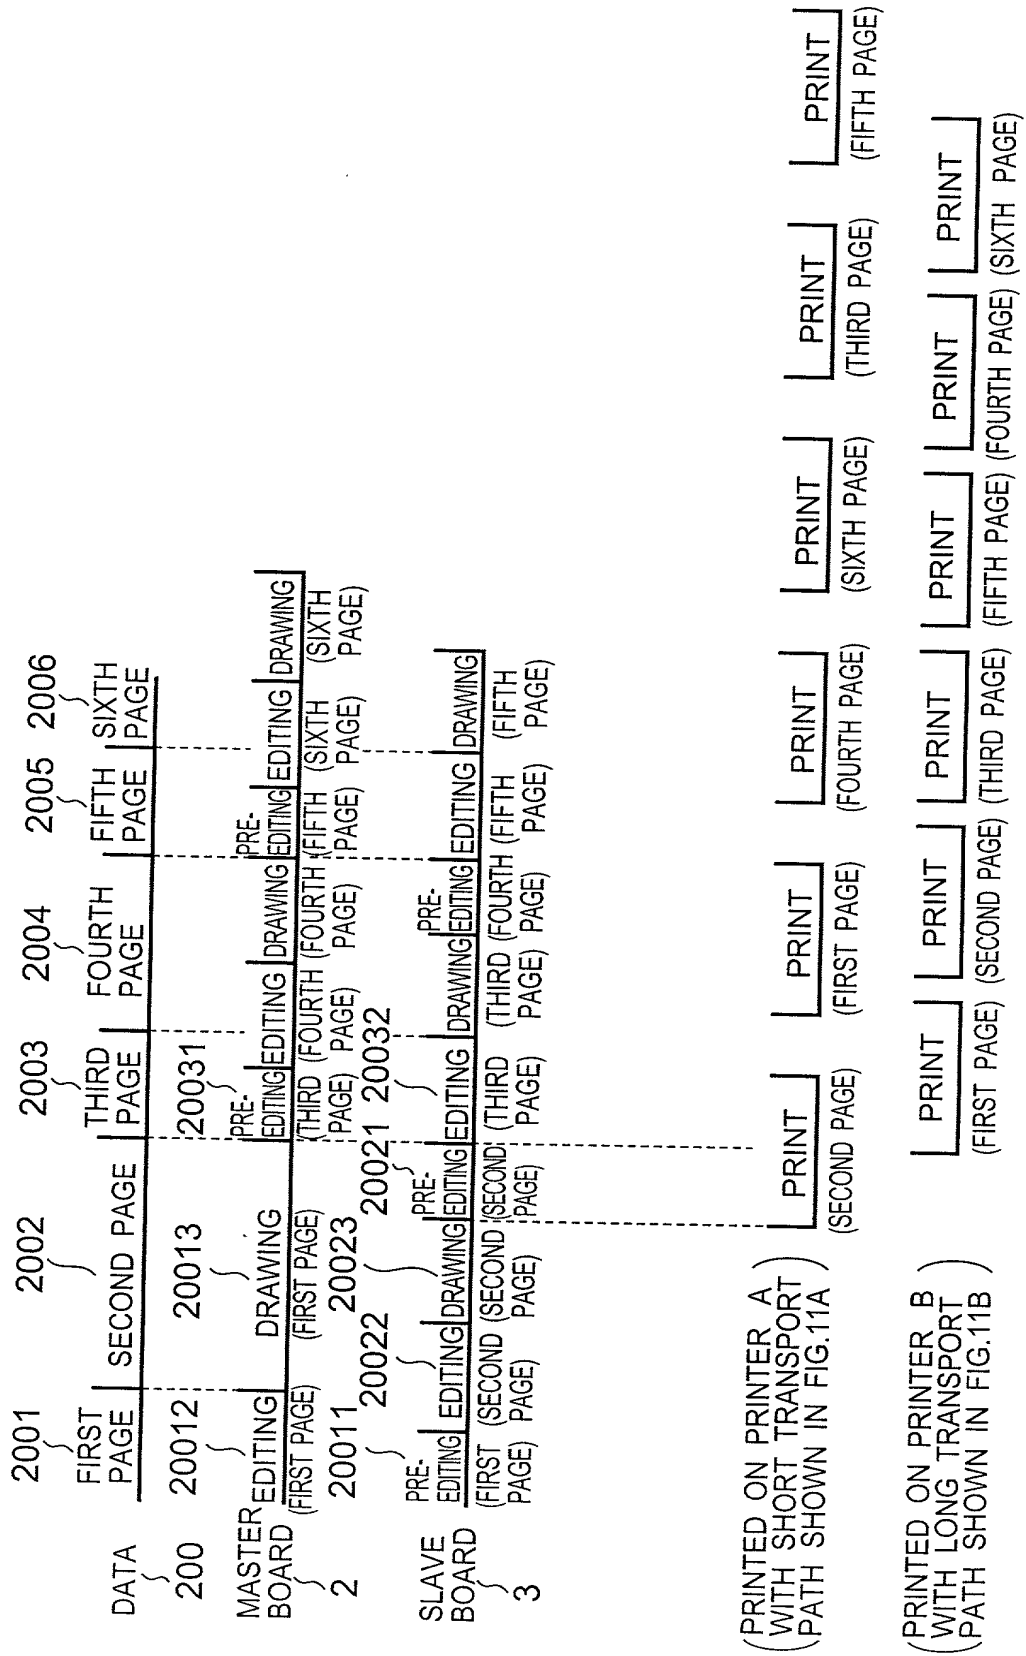


FIG.4A

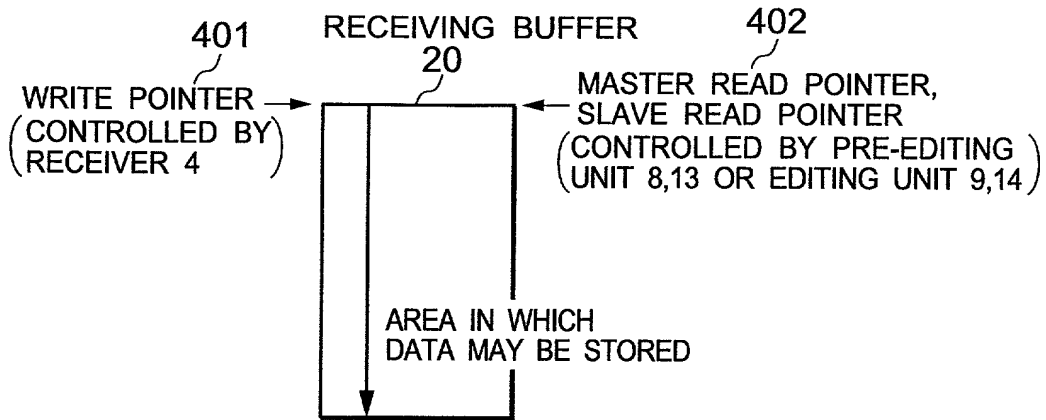


FIG.4B

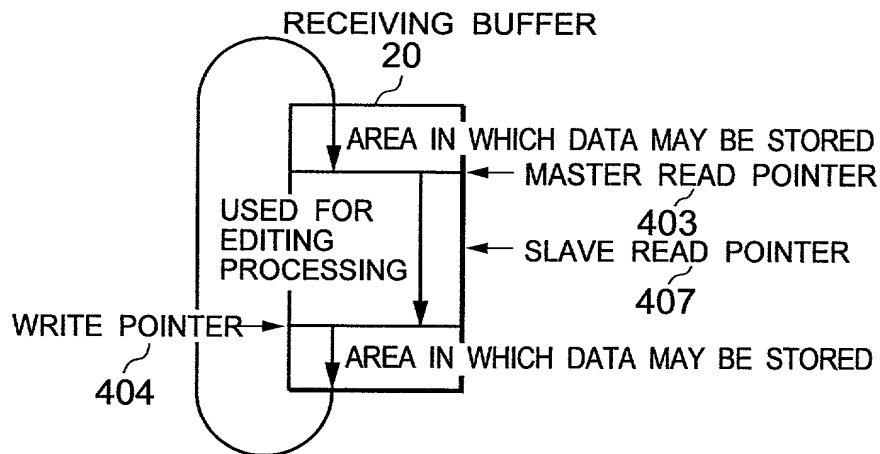


FIG.4C

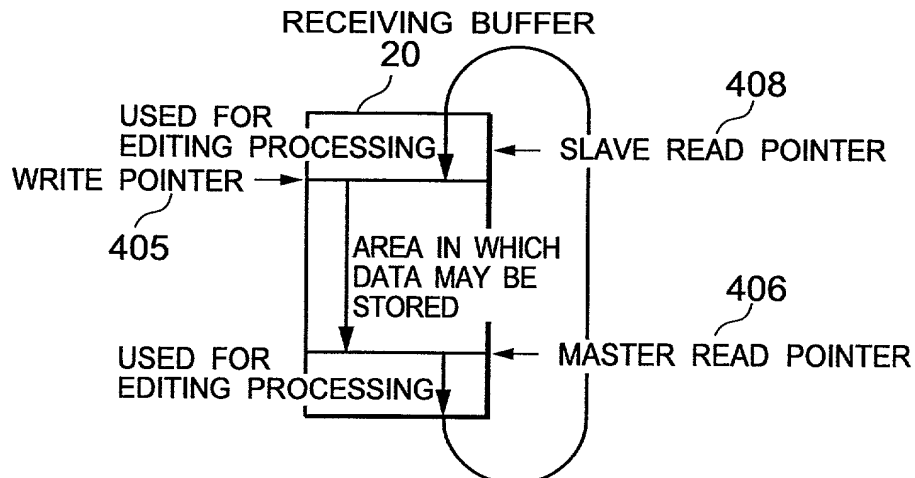


FIG. 5

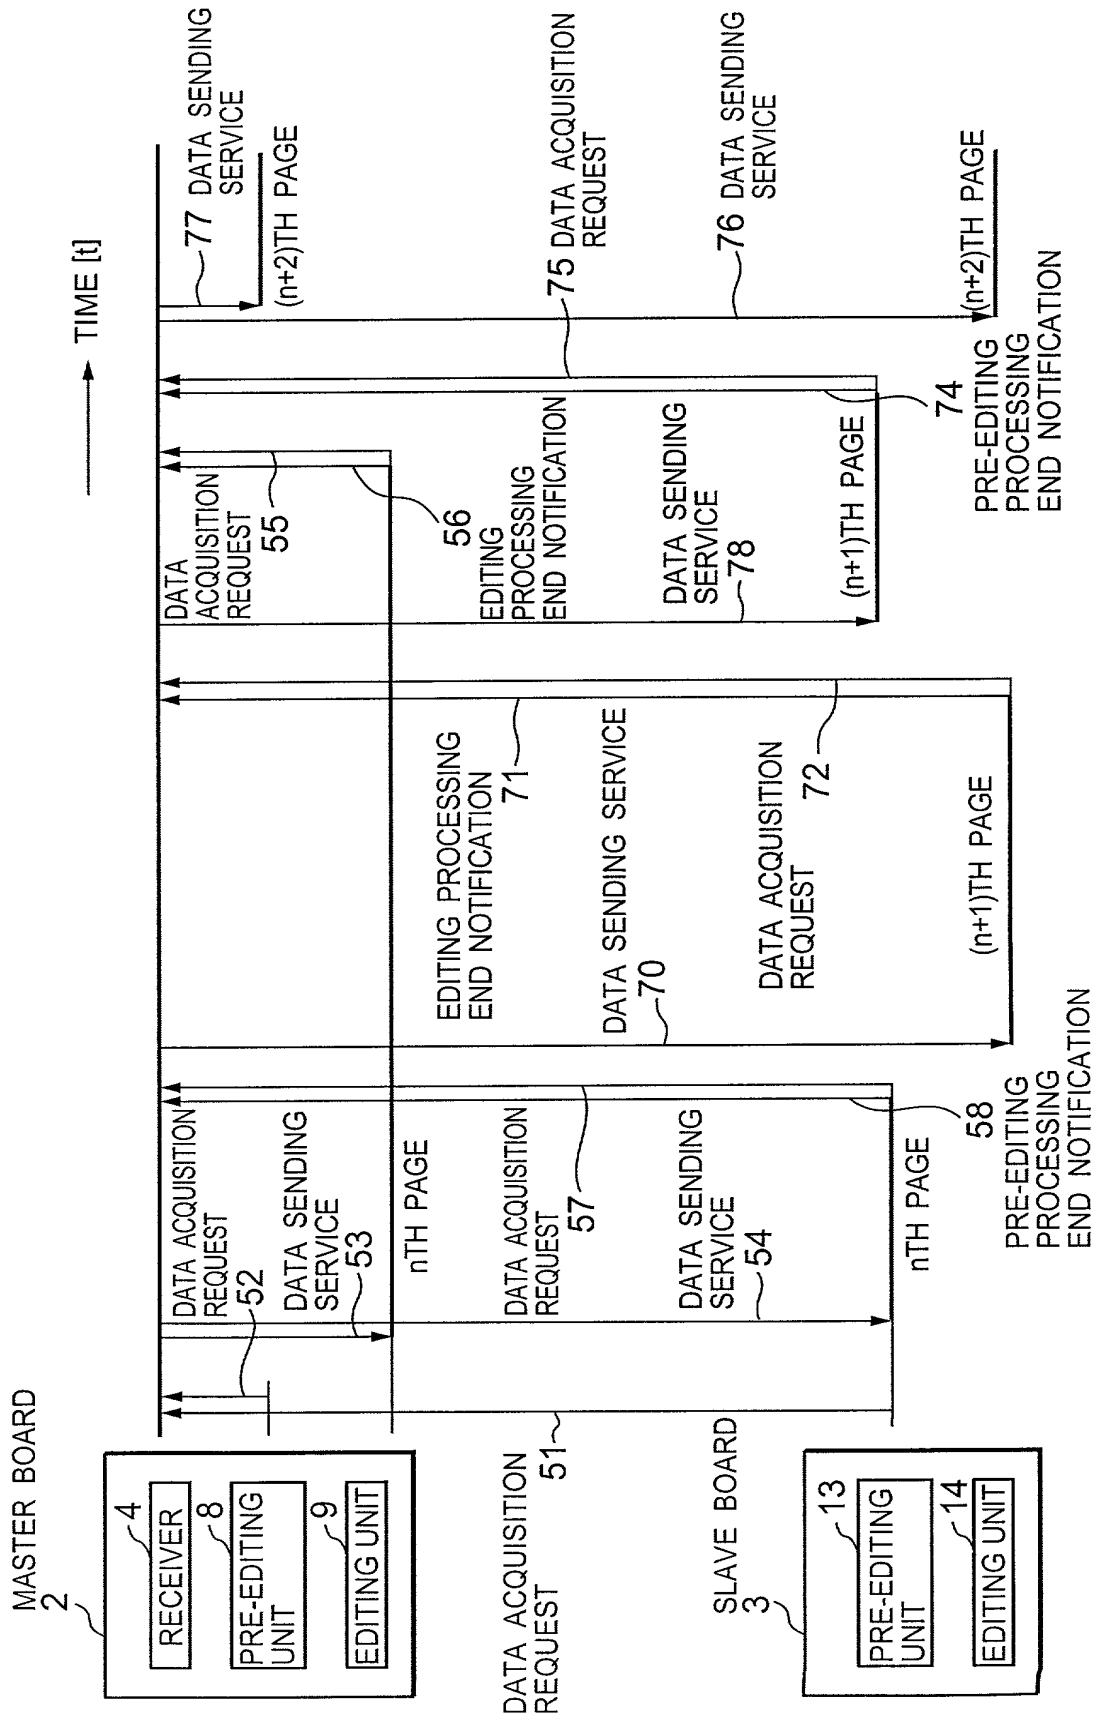




FIG. 6

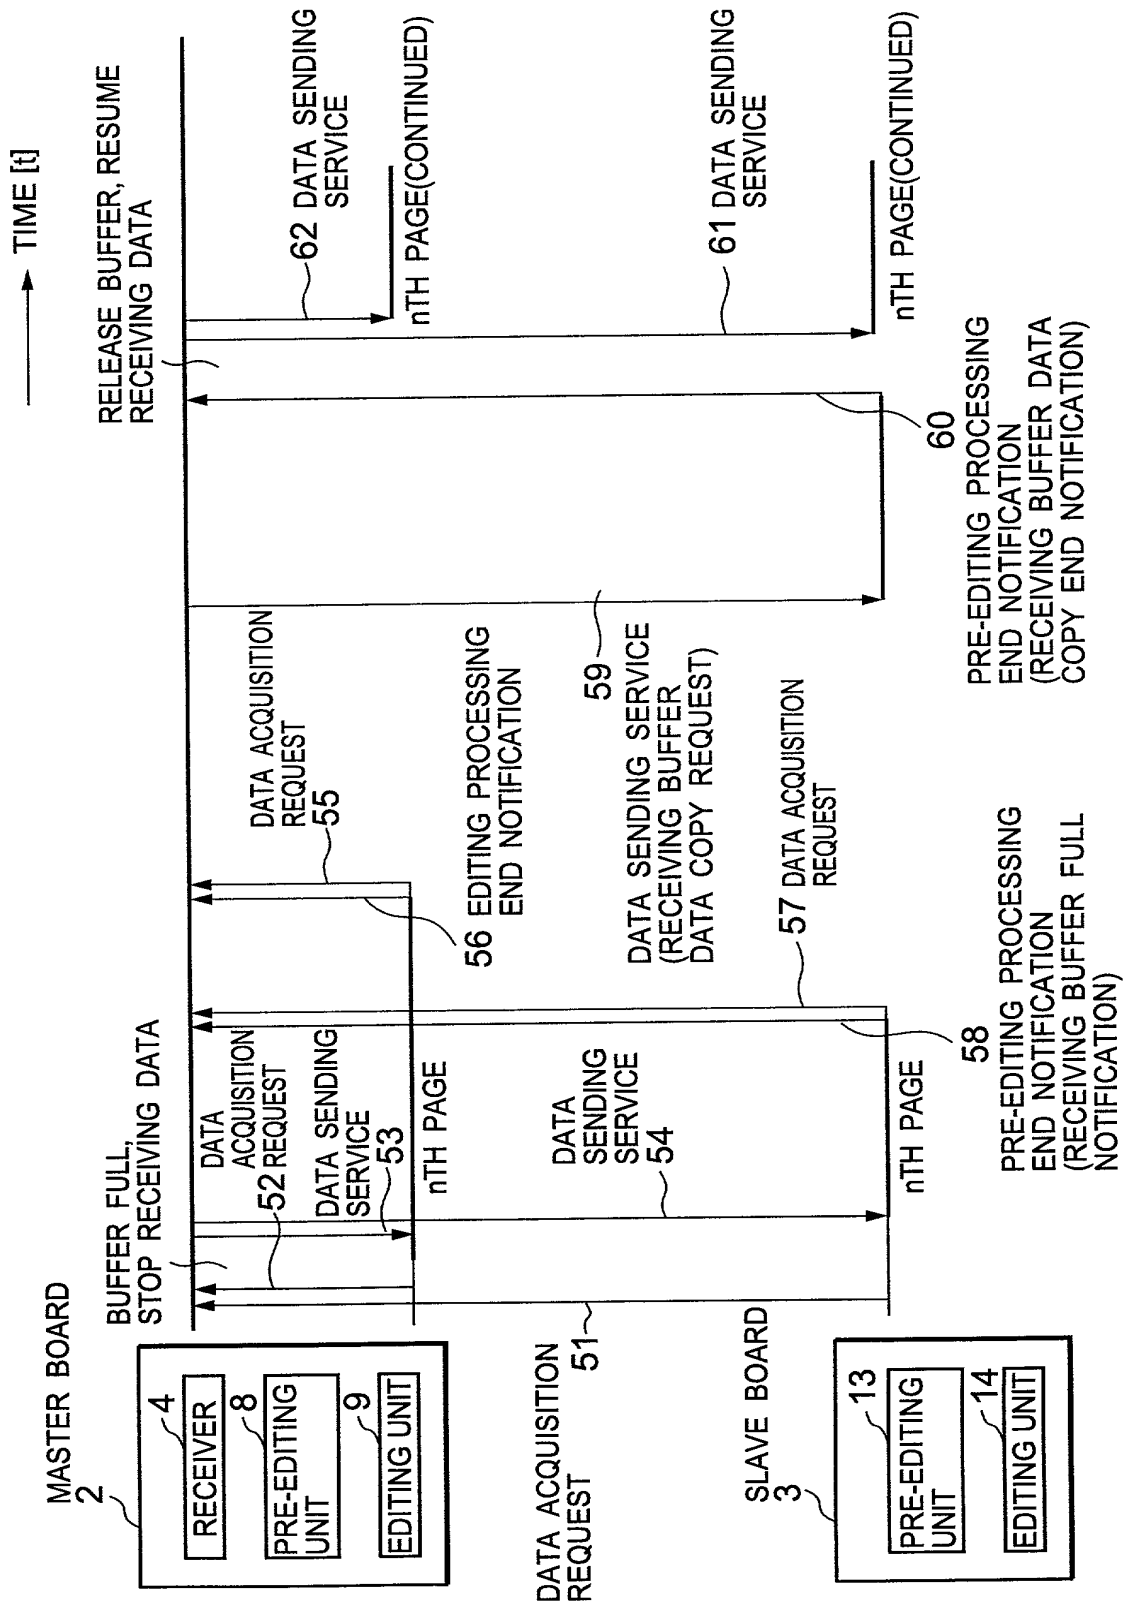
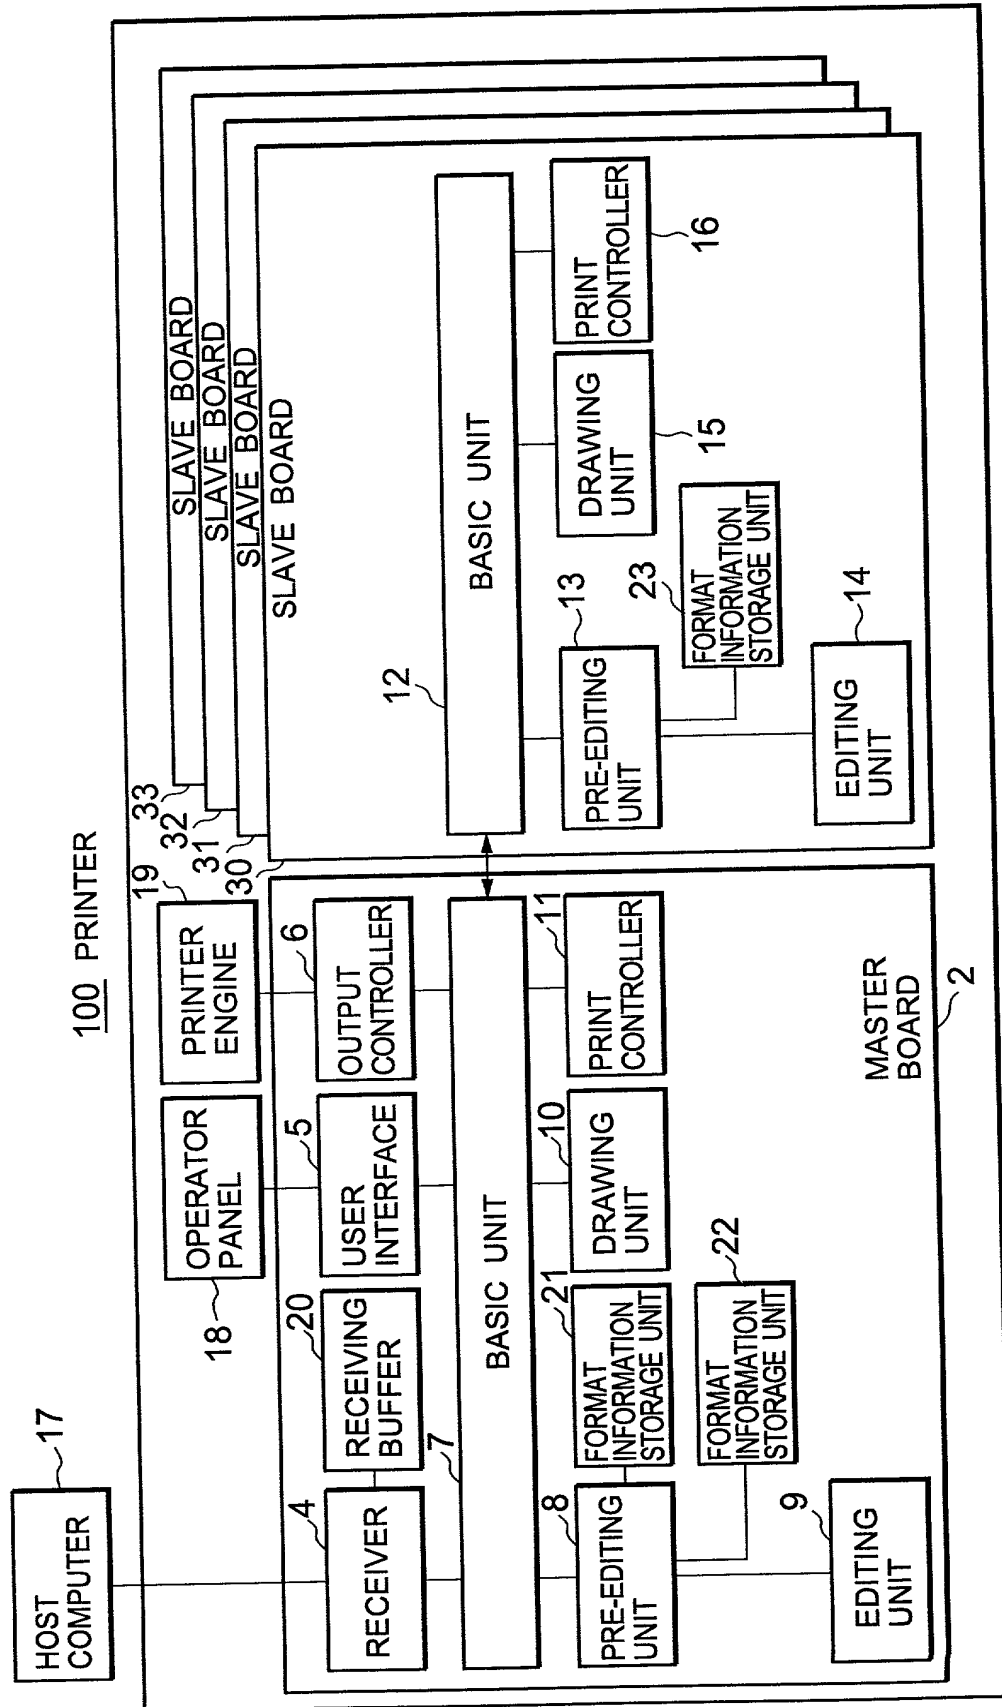


FIG. 7



200	2001	2002	2003	2006	2006
	FIRST PAGE	SECOND PAGE	THIRD PAGE	FOURTH PAGE	FIFTH PAGE
2	20012	20013			
MASTER BOARD	EDITING	DRAWING			
	(FIRST PAGE)	(FIRST PAGE)			
30	20011	20022	20023	20051	20062 20063
	PRE-		PRE-		
SLAVE BOARD	EDITING	DRAWING	EDITING	EDITING	DRAWING
	(FIRST PAGE)	(SECOND PAGE)	(FIFTH PAGE)	(SIXTH PAGE)	(SIXTH PAGE)
31	20021	20032	20033		
	PRE-				
SLAVE BOARD	EDITING	EDITING	DRAWING		
	(SECOND PAGE)	(THIRD PAGE)	(THIRD PAGE)		
32	20031~PRE-	20042	20043		
SLAVE BOARD	EDITING	EDITING	DRAWING		
	(THIRD PAGE)	(FOURTH PAGE)	(FOURTH PAGE)		
33	20041~PRE-	20052	20053		
SLAVE BOARD	EDITING	EDITING	DRAWING		
	(FOURTH PAGE)	(FIFTH PAGE)	(FIFTH PAGE)		
	(PRINTED ON PRINTER A WITH SHORT PAPER TRANSPORT PATH SHOWN IN FIG.11A)	PRINT	PRINT	PRINT	PRINT
	(PRINTED ON PRINTER B WITH LONG PAPER TRANSPORT PATH SHOWN IN FIG.11B)	(SECOND PAGE)	(FOURTH PAGE)	(FOURTH PAGE)	(THIRD PAGE)

FIG. 9

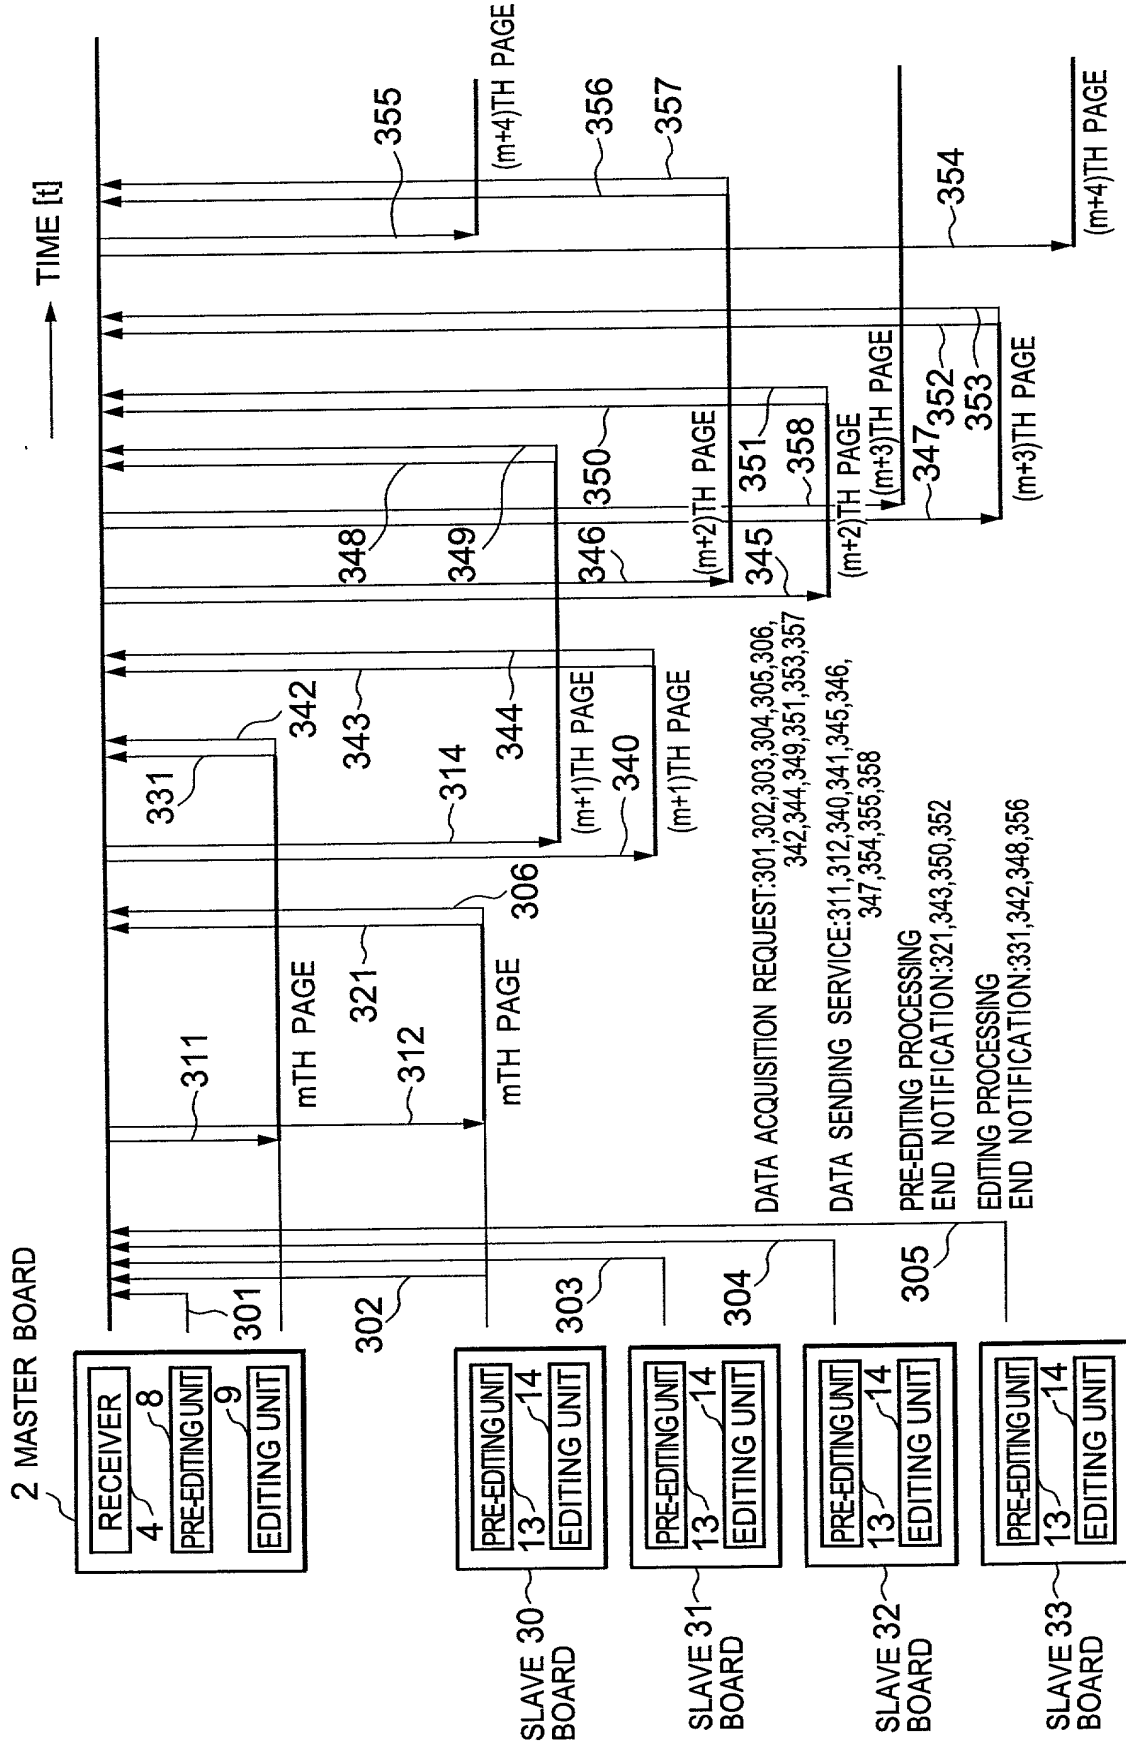


FIG. 10

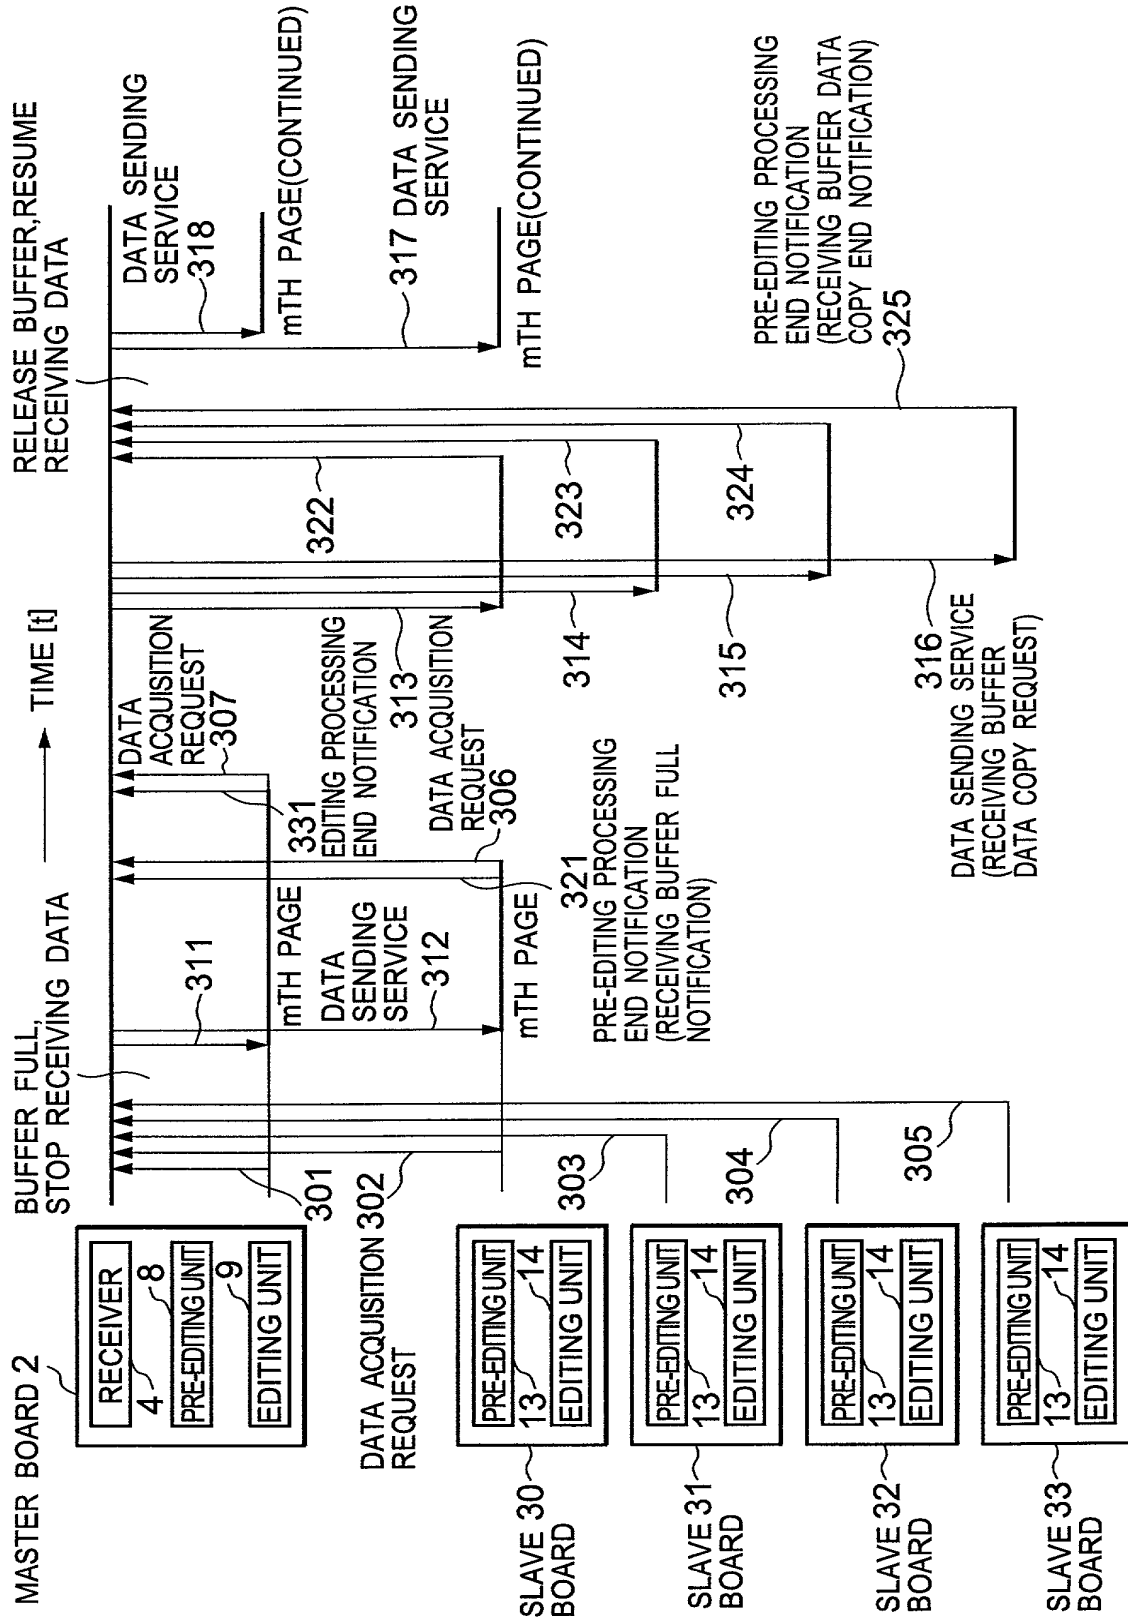


FIG.11A

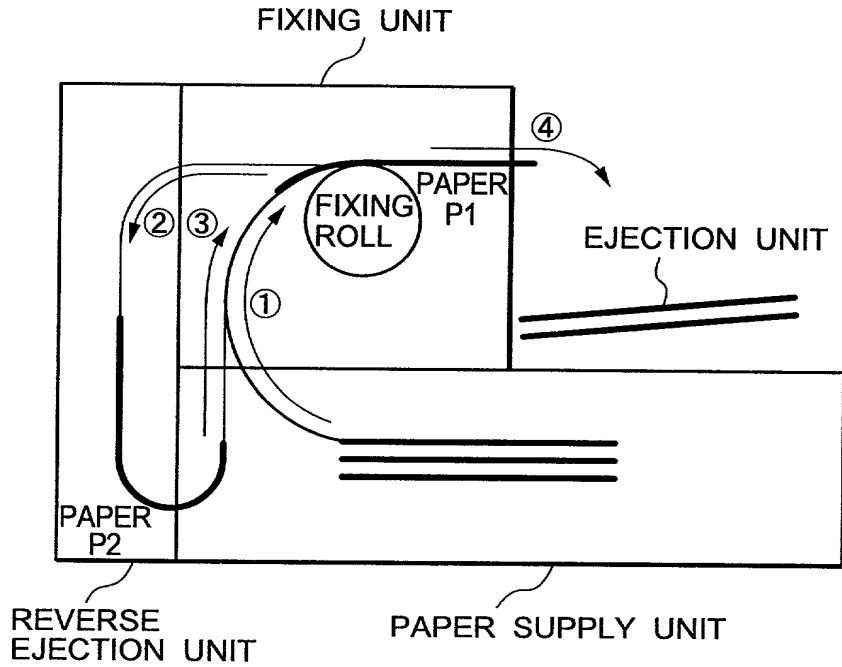


FIG.11B

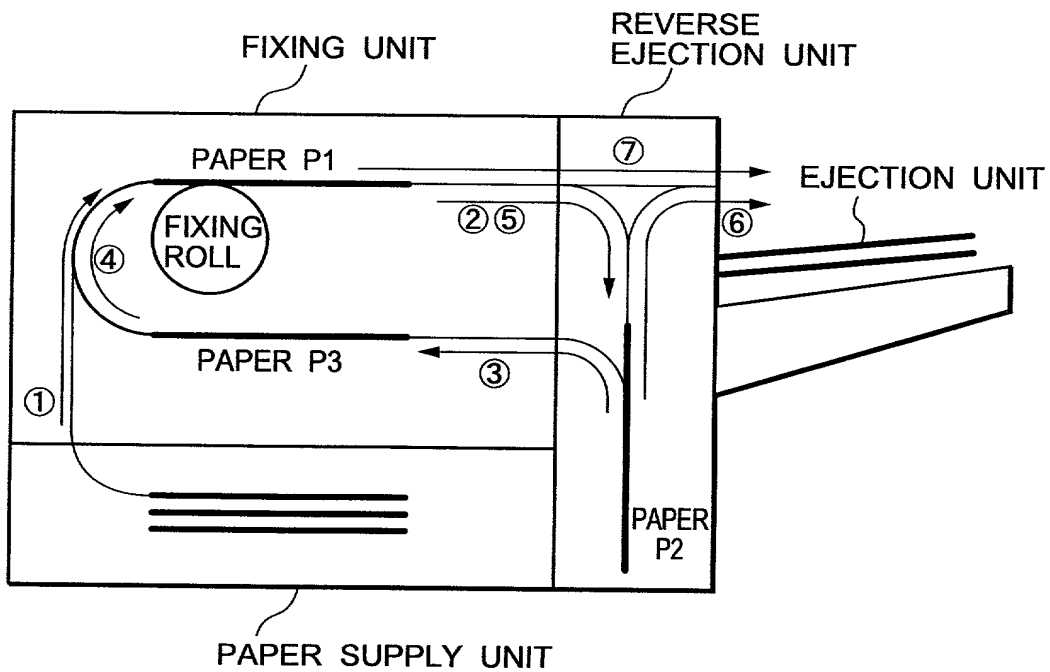


FIG.12

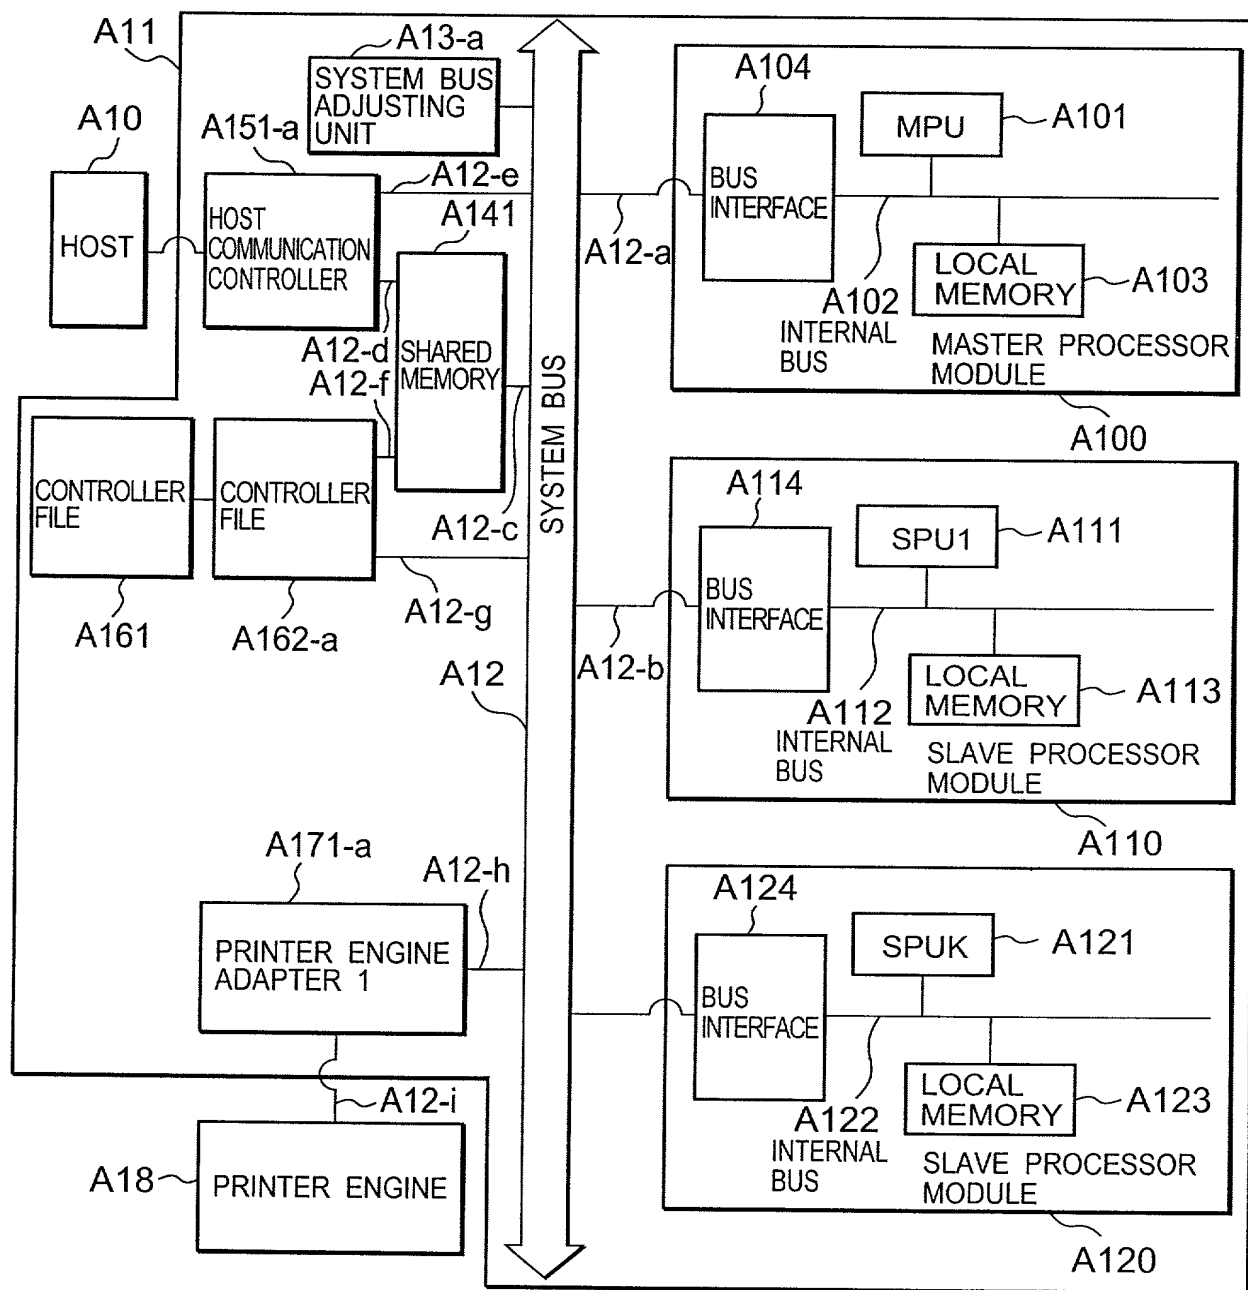
A1 PRINT CONTROLLER

FIG.13

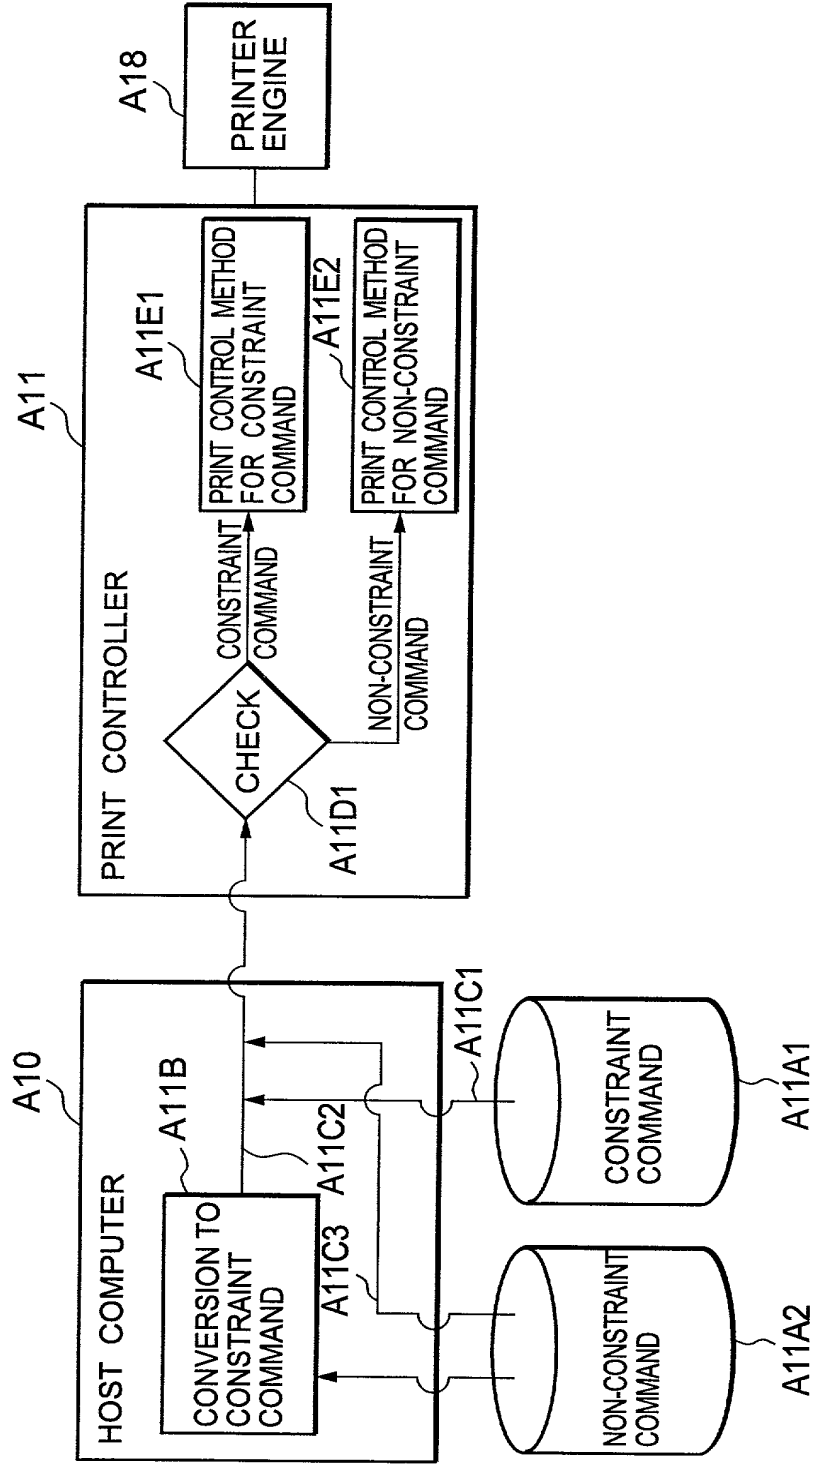




FIG.14

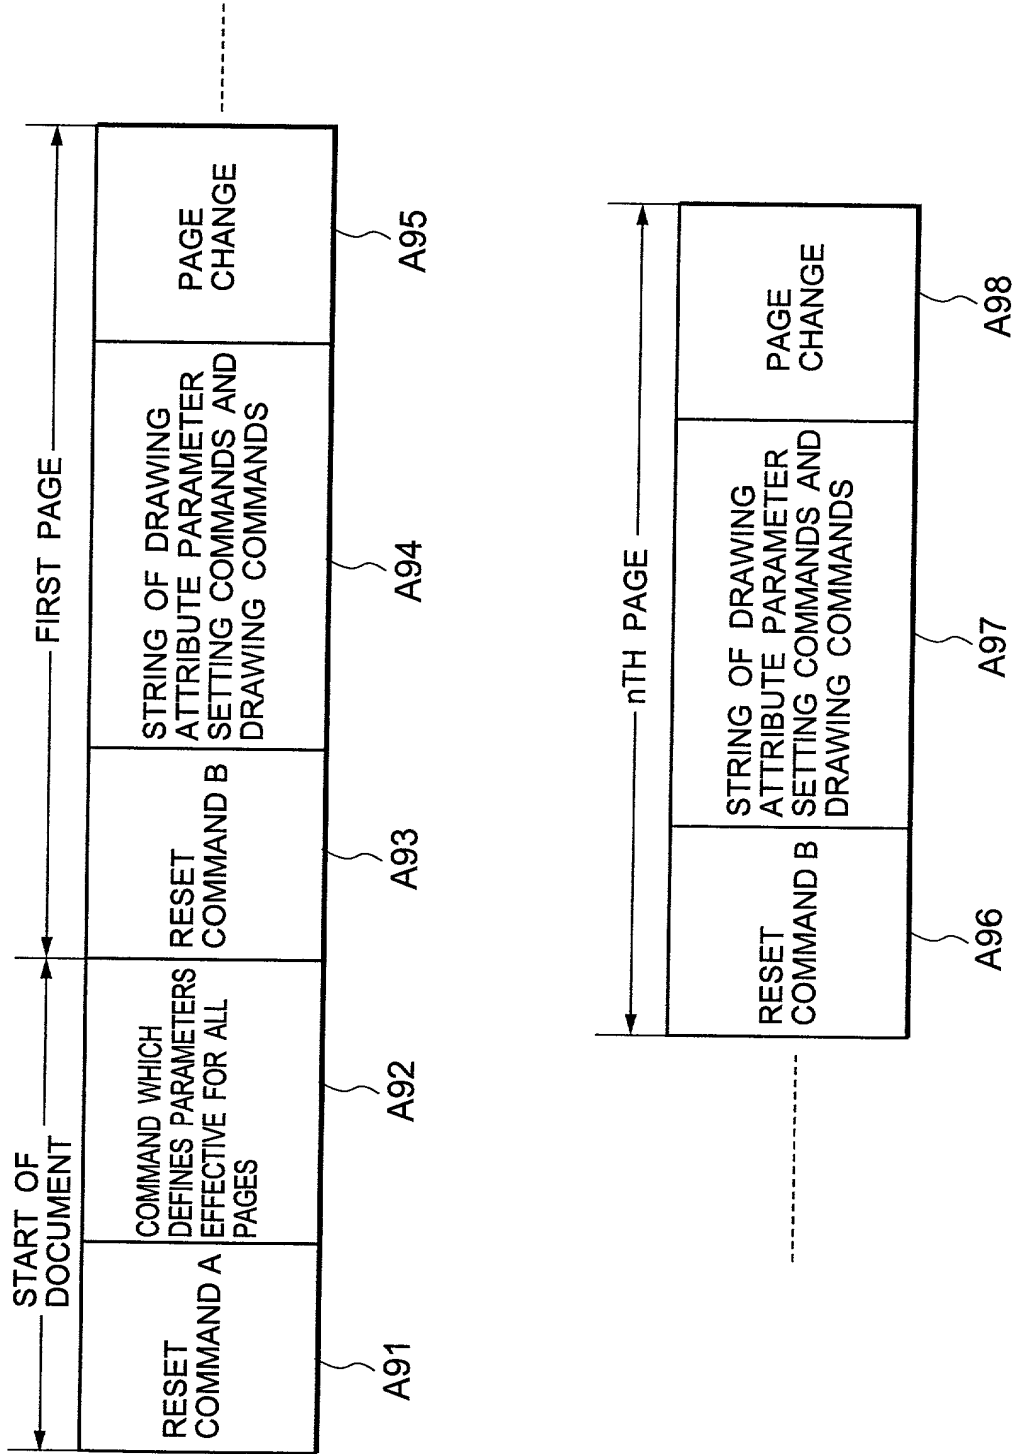


FIG.15

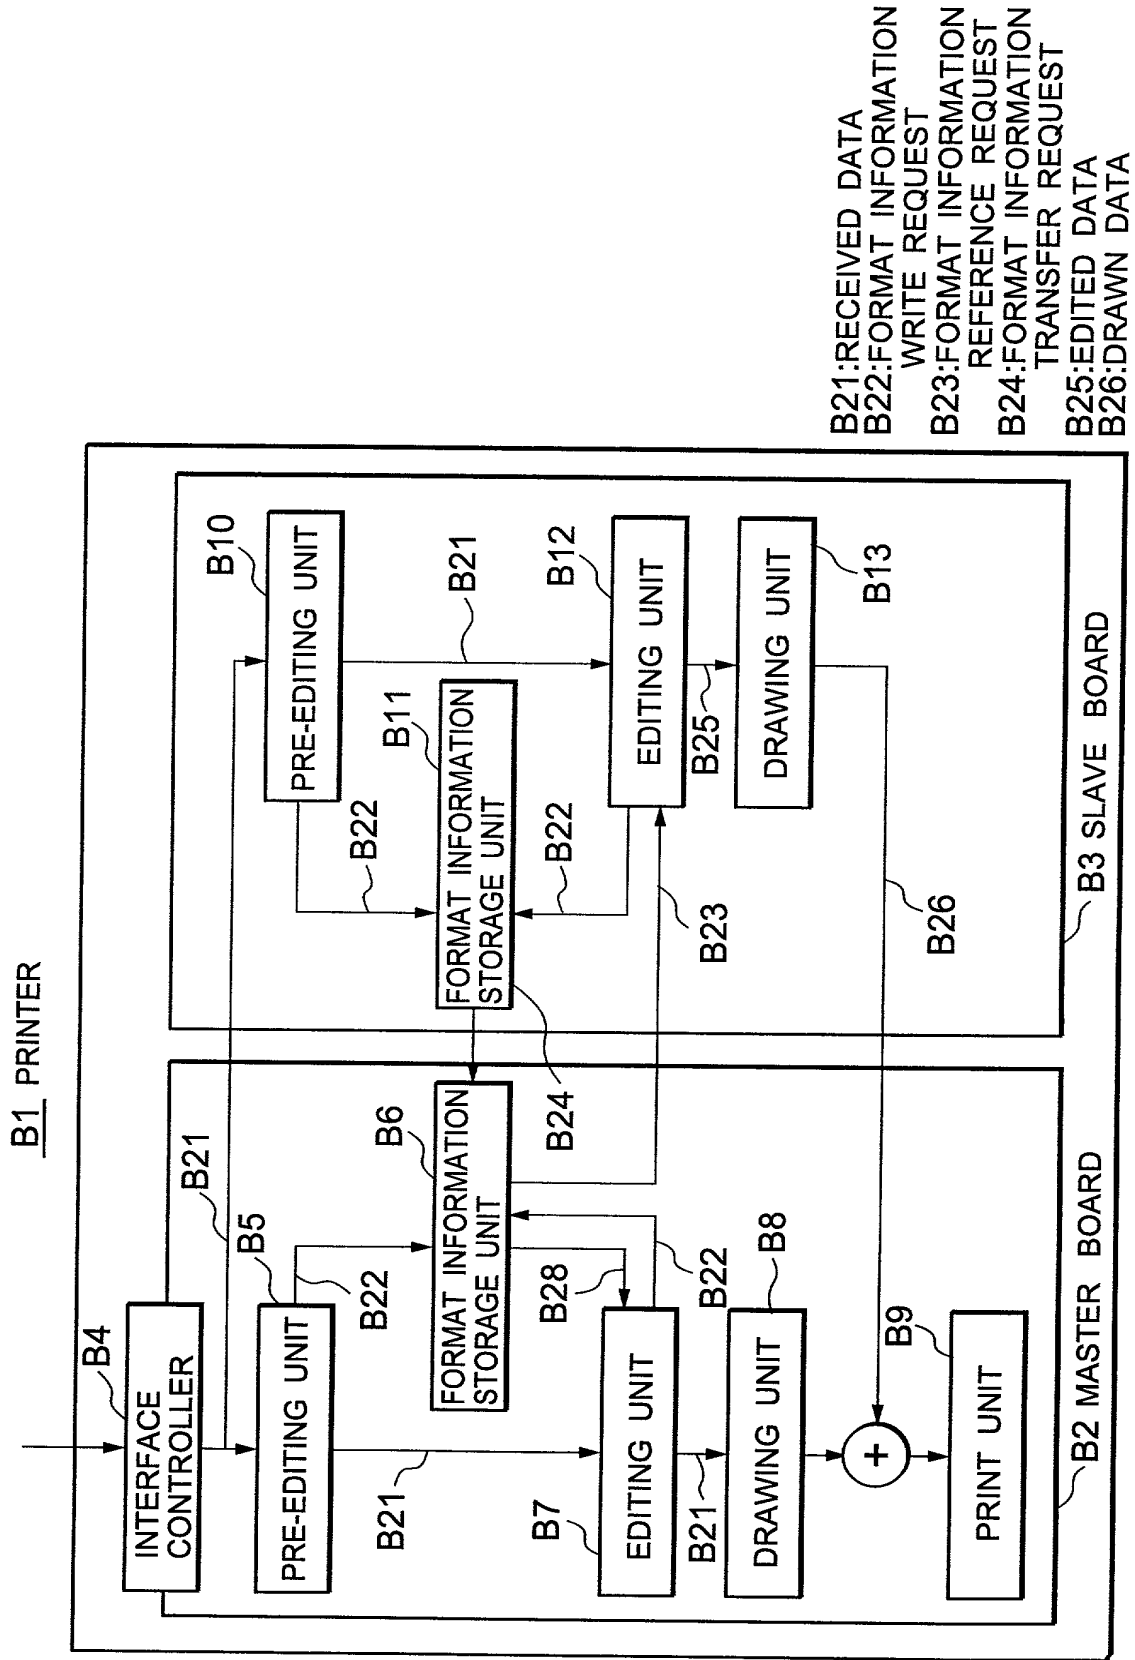
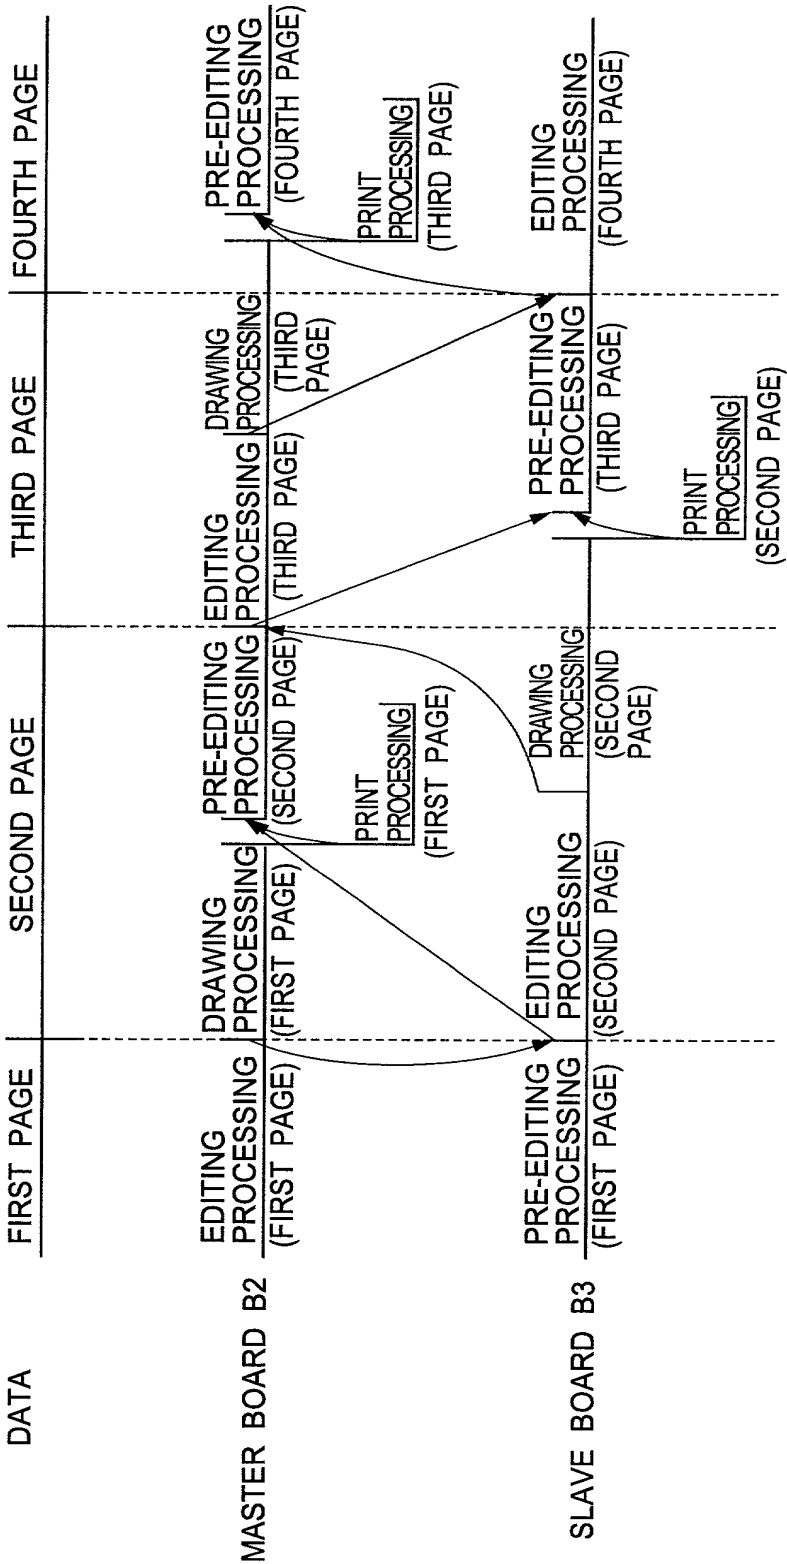


FIG.16



## DECLARATION AND POWER OF ATTORNEY

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name;

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

PRINTER

the specification of which:

(check one) ☒ is attached hereto

☐ was filed on \_\_\_\_\_, as  
Application Serial No. \_\_\_\_\_  
and was amended on \_\_\_\_\_.  
(if applicable)

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, § 1.56\*

I hereby claim foreign priority benefits under Title 35, United States Code, § 119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s)			priority claimed	
			X	
311284/1999	Japan	1/11/1999	yes	no
(Number)	(Country)	(Day/Month/Year Filed)		
_____	_____	_____	yes	no
(Number)	(Country)	(Day/Month/Year Filed)		
_____	_____	_____	yes	no
(Number)	(Country)	(Day/Month/Year Filed)		

I hereby claim the benefit under Title 35, United States Code, § 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, § 112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, § 1.56 which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

(Application Serial No.)

(Filing Date)

(Status: patented, pending, abandoned)


**Power of Attorney:** As a named inventor, I hereby appoint Sean M. McGinn, Reg. 34,386, and Frederick W. Gibb, III, Reg. No. 37,629 as attorneys and/or agents to prosecute this application and transact all business in the Patent and Trademark Office connected therewith. All correspondence should be directed to **McGinn & Gibb, P.C., 1701 Clarendon Boulevard, Suite 100, Arlington, Virginia 22209**. Telephone calls should be directed to McGinn & Gibb, P.C. at (703) 294-6699.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful

false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full Name of Sole

or First Inventor TAKEHIKO OGURA

Inventor's Signature Takehiko Ogura  Date 10/23/2000

Residence Tokyo, Japan

Citizenship Japanese

Post Office Address c/o NEC Data Terminals, Ltd., 3-49-1, Kamiishihara, Chofu-shi, Tokyo, Japan

Full Name of Second

Joint Inventor, If Any \_\_\_\_\_

Inventor's Signature \_\_\_\_\_ Date \_\_\_\_\_

Residence \_\_\_\_\_

Citizenship \_\_\_\_\_

Post Office Address \_\_\_\_\_

Full Name of Third

Joint Inventor, If Any \_\_\_\_\_

Inventor's Signature \_\_\_\_\_ Date \_\_\_\_\_

Residence \_\_\_\_\_

Citizenship \_\_\_\_\_

Post Office Address \_\_\_\_\_

Full Name of Fourth

Joint Inventor, If Any \_\_\_\_\_

Inventor's Signature \_\_\_\_\_ Date \_\_\_\_\_

Residence \_\_\_\_\_

Citizenship \_\_\_\_\_

Post Office Address \_\_\_\_\_

(An additional sheet(s) is/are attached hereto if the present invention includes more than four inventors.)

\*Title 37, Code of Federal Regulations, § 1.56:

(a) A patent by its very nature is affected with a public interest. The public interest is best served, and the most effective patent examination occurs when, at the time an application is being examined, the Office is aware of and evaluates the teachings of all information material to patentability. Each individual associated with the filing and prosecution of a patent application has a duty of candor and good faith toward the Patent and Trademark Office, which includes a duty to disclose to the Office all information known to that individual to be material to patentability as defined in this section. The duty to disclose information exists with respect to each pending claim until the claim is canceled or withdrawn from consideration, or the application becomes abandoned.

(b) Under this section, information is material to patentability when it is not cumulative to information already of record or being made of record in the application, and (1) it establishes, by itself or in combination with other information, a prima facie case of unpatentability; or (2) it refutes, or is inconsistent with, a position the applicant takes in: (i) opposing an argument of unpatentability relied on by the Office, or (ii) asserting an argument of patentability.